


EQ FLOOR

EQ FLOOR

Education, Classroom, Library, Corridor, Preschool



BASIC CONSTRUCTION

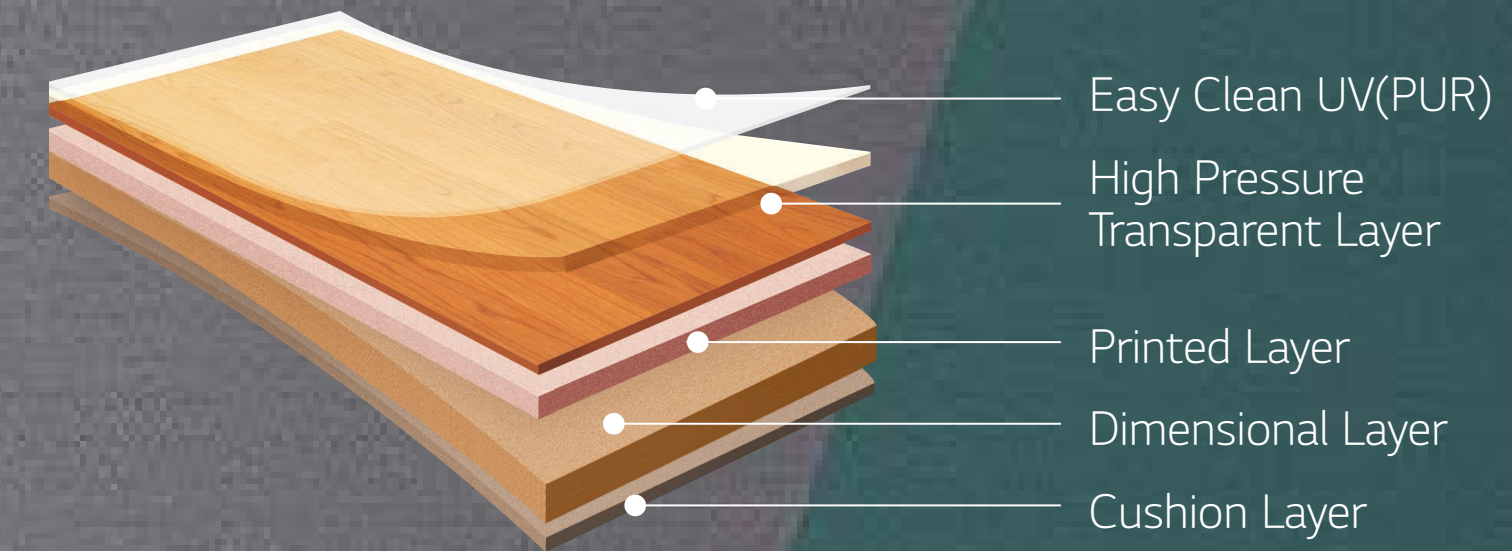

- **Excellent shock absorption**
- **The cushioning effect minimizes surface noise**
- **Ease cleaning and low maintenance cost**
No Wax & No Polish applied on the PUR treated surface

FEATURE



Shock and noise absorption

Cushion layer minimizes shock damage and surface noise



Strong resistance to scratch

Not easily worn out against heavy traffic



Low maintenance cost and anti-bacterial

Superior resistance to outer contaminants and bacteria

EQ FLOOR

INDEX

6.0mmT × 1,830mm × 13M (13 Colors)

※ Colors can be different from samples/index. Please check the actual product.
※ Applying the natural characters of woods/stones with diverse colors and visuals.

MARBLE



EQF2451



EQF2452



EQF2453



EQF2454



EQF2455



EQF2456

WOOD



EQF1702



EQF8576




EQF8882



EQF50012

CARPET

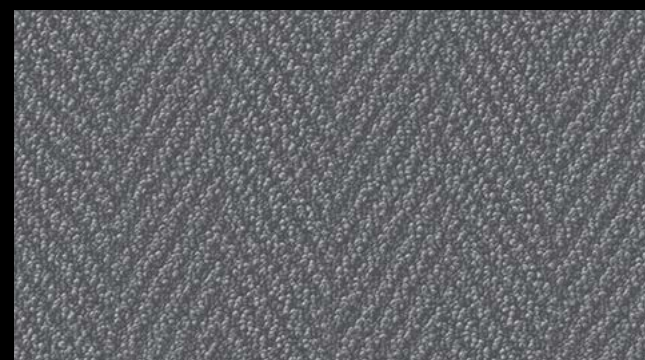

EQF9511



EQF9512



EQF9513

MARBLE



EQF2451

EQF2454

EQF2452

EQF2455

EQF2453

EQF2456



MARBLE



EQF2451

EQF2454

EQF2452

EQF2455

EQF2453

EQF2456



MARBLE

EQF2451

EQF2454



EQF2452

EQF2455

EQF2453

EQF2456



MARBLE

EQF2451

EQF2454

EQF2452

EQF2455

EQF2453

EQF2456



MARBLE

EQF2451

EQF2454

EQF2452

EQF2455



EQF2453

EQF2456



MARBLE

EQF2451

EQF2454

EQF2452

EQF2455

EQF2453

EQF2456



MARBLE



EQF 2451
EQF 2455
EQF 2452

EQF 2451
EQF 2453
EQF 2452

EQF 2456
EQF 2455
EQF 2454



MARBLE

EQF 2451
EQF 2455
EQF 2452

EQF 2451
EQF 2453
EQF 2452

EQF 2456
EQF 2455
EQF 2454



MARBLE

EQF 2451
EQF 2455
EQF 2452

EQF 2451
EQF 2453
EQF 2452

EQF 2456
EQF 2455
EQF 2454



WOOD



EQF1702

EQF8576

EQF8882

EQF50012



WOOD



WOOD



WOOD

EQF1702

EQF8576

EQF8882

EQF50012



CARPET



EQF9511

EQF9512

EQF9513



CARPET

EQF9511



EQF9512

EQF9513




CARPET

EQF9511

EQF9512

EQF9513

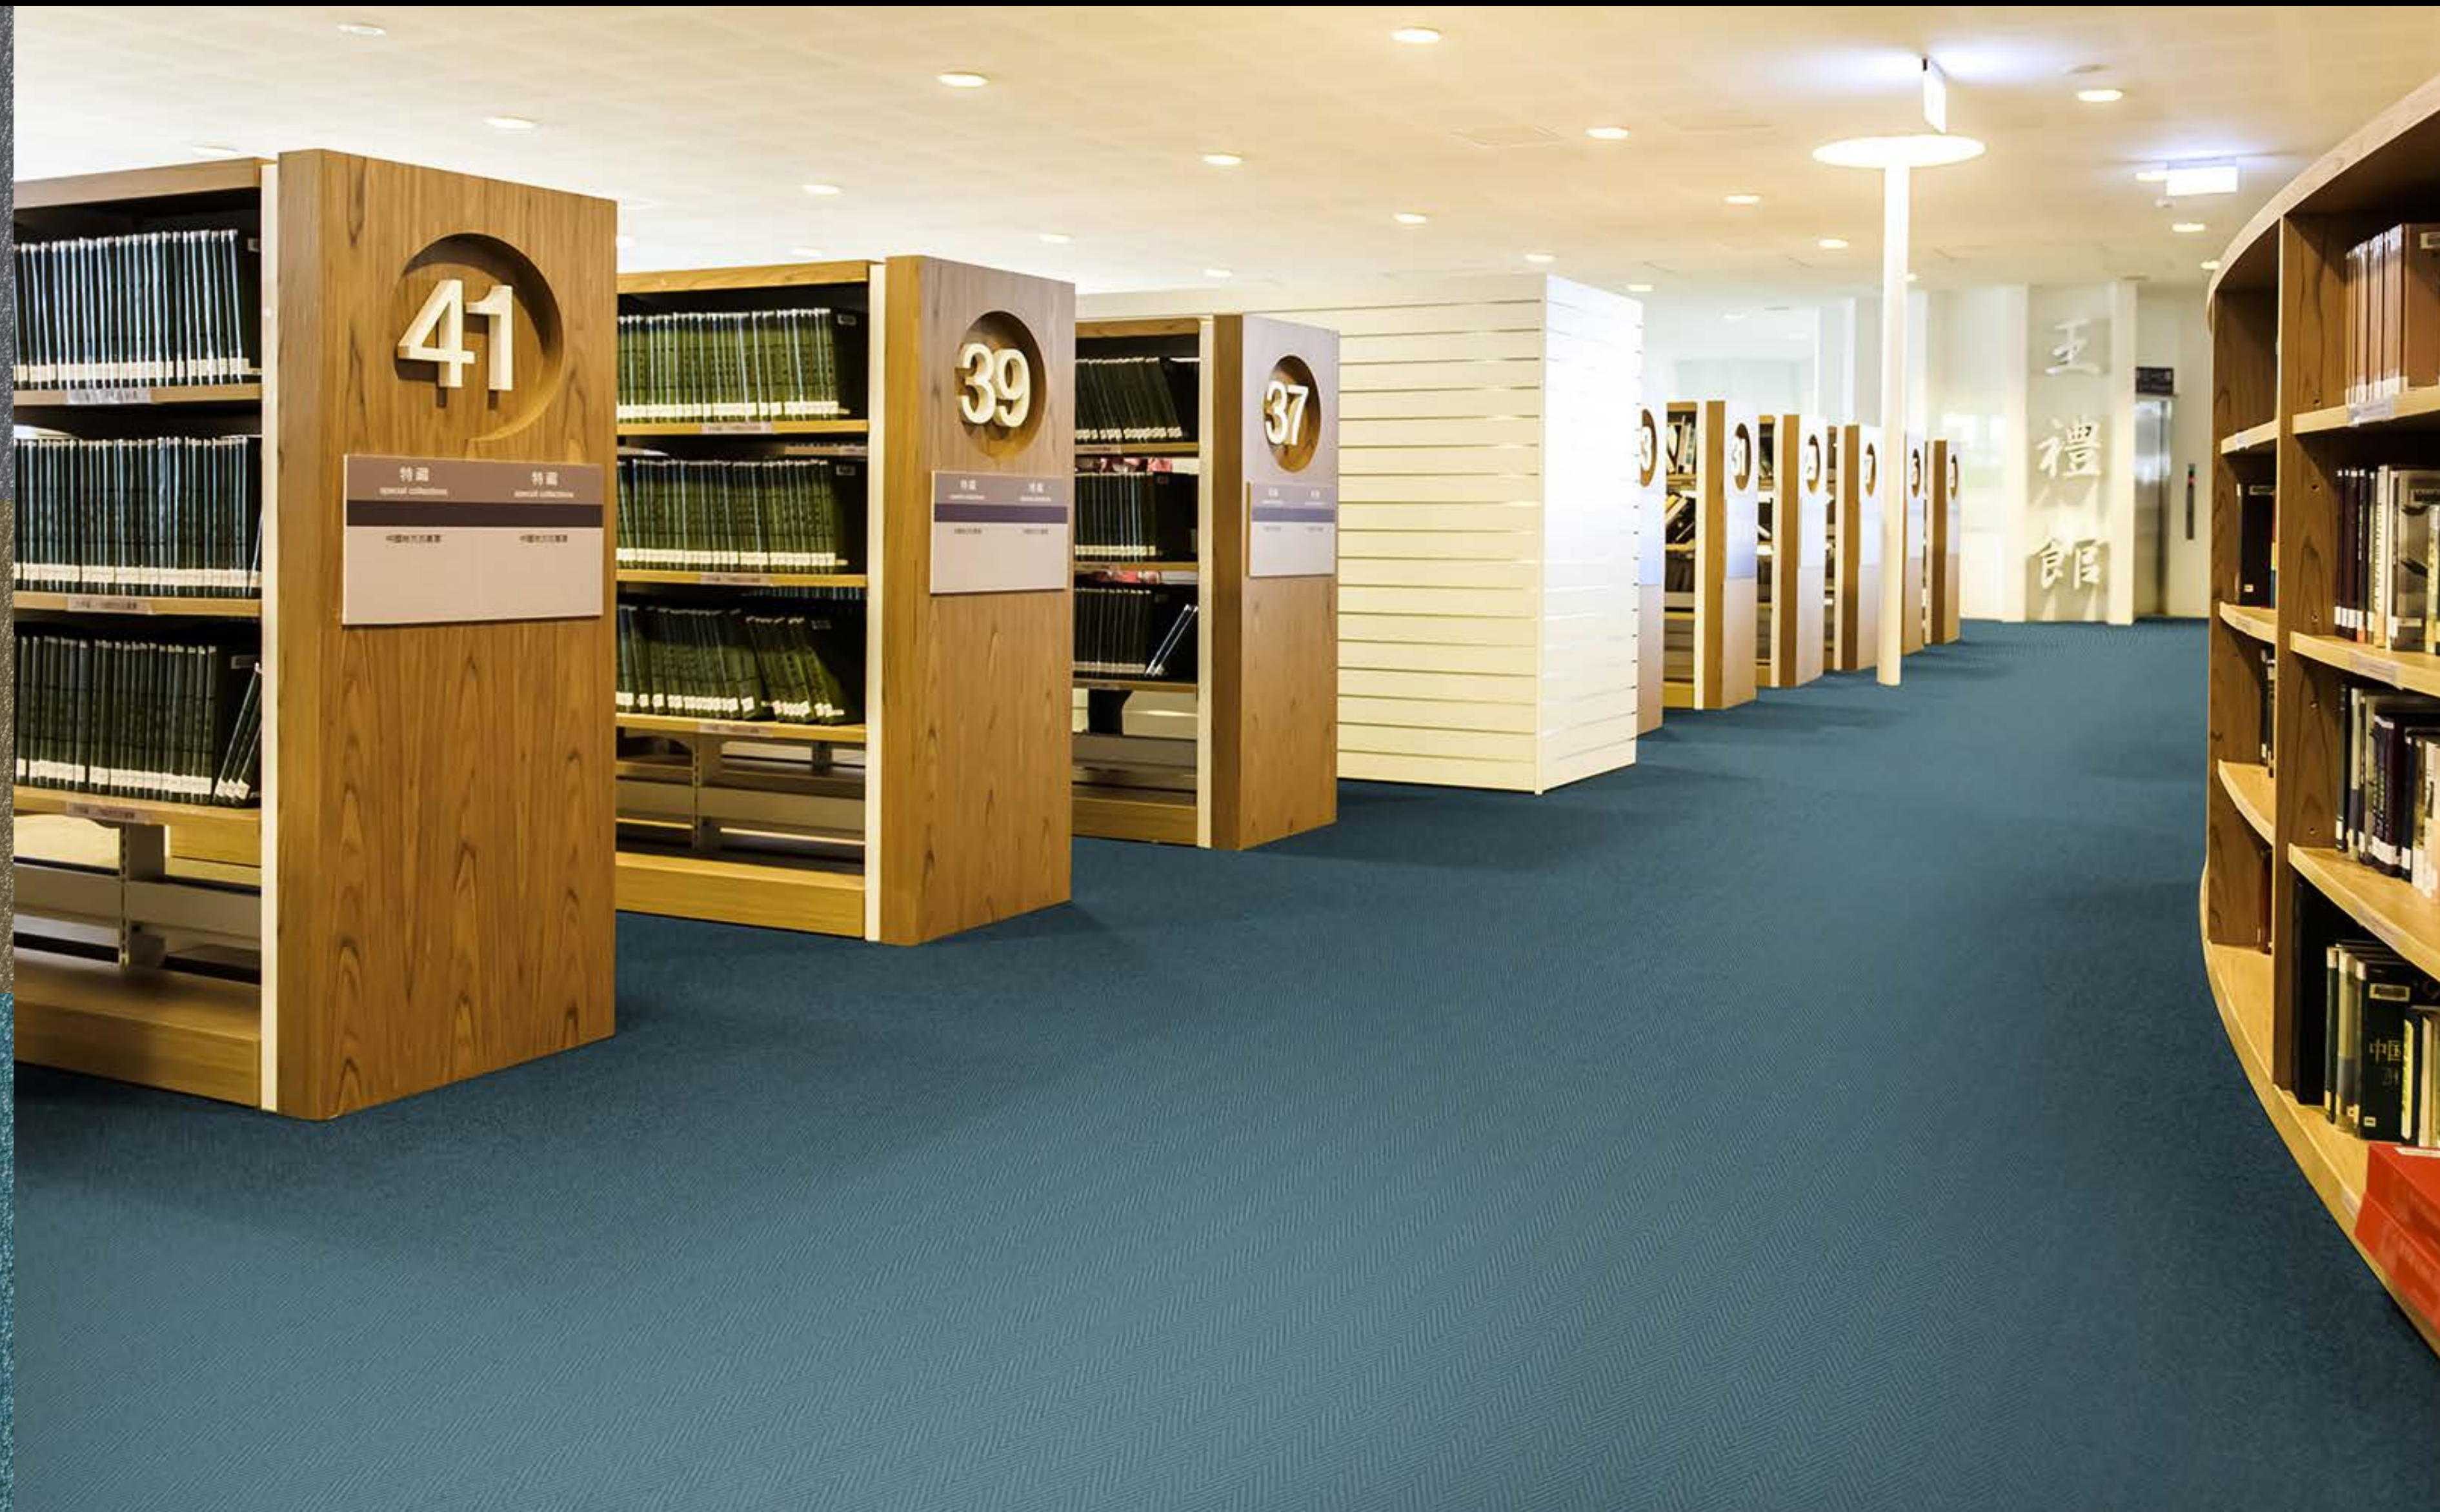

CARPET



EQF 9511
EQF 9513

EQF 9512
EQF 9511

EQF 9512
EQF 9513



CARPET

EQF 9511
EQF 9513

EQF 9512
EQF 9511

EQF 9512
EQF 9513



CARPET

EQF 9511
EQF 9513

EQF 9512
EQF 9511

EQF 9512
EQF 9513



EQ FLOOR

Education, Classroom, Library, Corridor, Preschool

TECHNICAL DATA



CHARACTERISTIC	STANDARD	UNIT	RESULT
Surface Treatment			Easy Cleans + (Anti-bacterial)
Format			Sheet
Roll length		m	13
Width	EN ISO 24344(EN 426)	mm	1,830
Thickness	EN ISO 24346(EN 428)	mm	6.0
Thickness of wear layer	EN ISO 24340(EN 429)	mm	1.0
Weight	EN ISO 23997(EN 430)	g/m ²	4,400
Residual Indentation	EN ISO 24343-1(EN 433)	mm	< 0.25
Dimensional Stability	EN ISO 23999(EN 434)	mm	Fulfilled
Suitable for underfloor heating			yes
Effect of furniture leg	EN 424		Fulfilled
Chemical Resistance	EN ISO 26987(EN 423)		Good resistance
Sound absorption	EN ISO 140-8	ΔdB	24
Reaction to Fire	EN 13501-1		Cfl-S1



EQ FLOOR



www.lxhausys.com

For more information, Go to Website

 **LX Hausys**

Copyright © LX Hausys All rights reserved.