


# GRAND TETON

# GRAND TETON

## Basic Construction

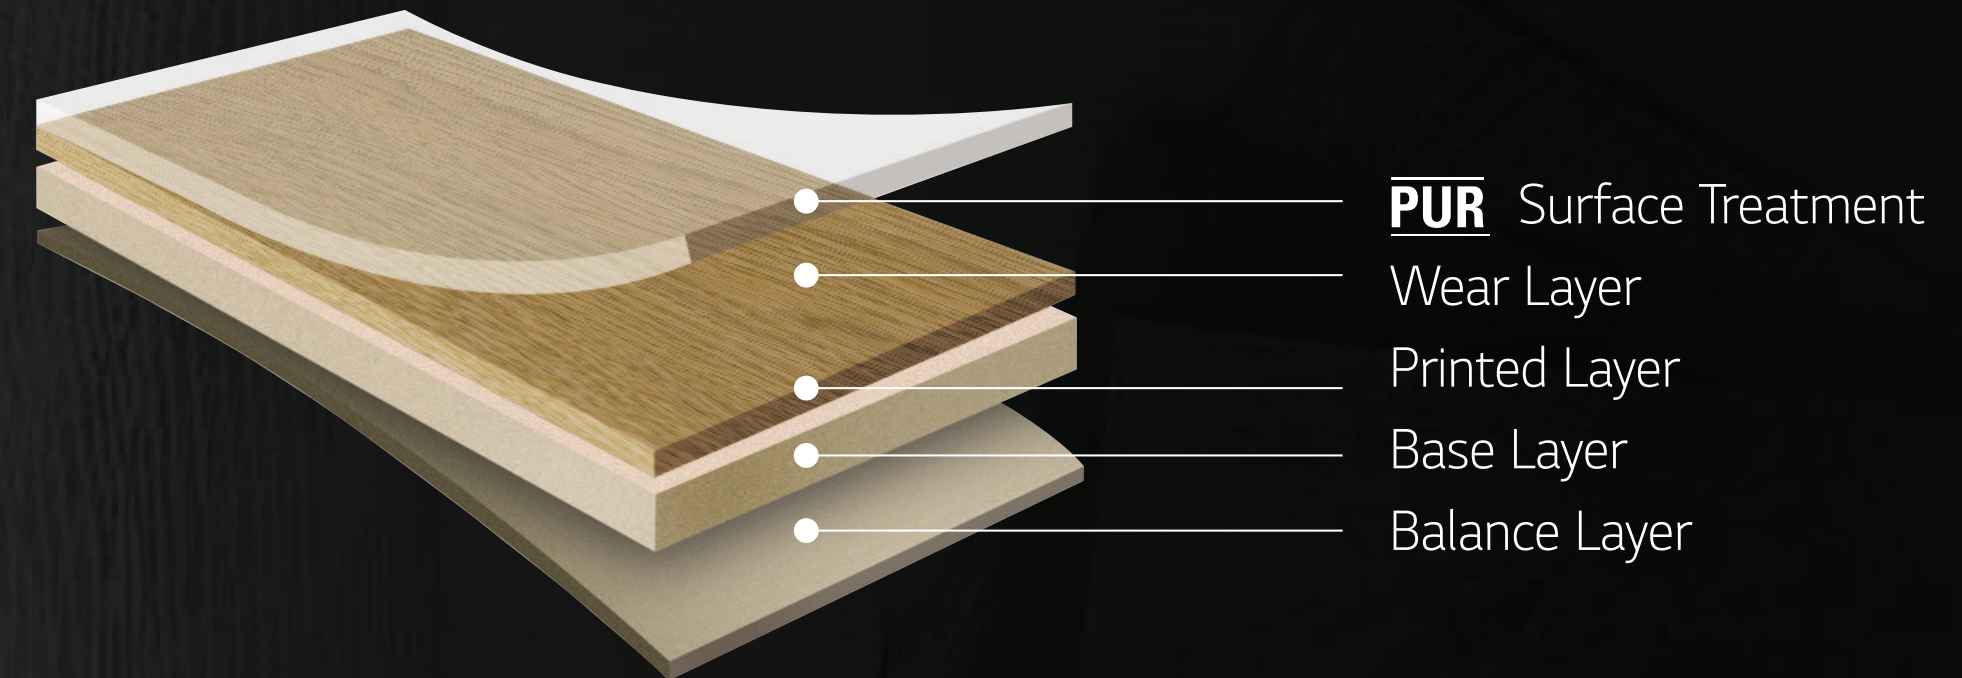

## Features

### *Eco & Human-friendly Product*

- FloorScore® and DIBt certified for low VOCs
- Phthalate Free(DEHP·DBP·BBP·DIDP·DINP·DNOP)  
& Heavy Metal Free(Cd·Pb·Hg·Cr6+)
- Made from safer, stronger 100% virgin raw materials

### *Excellence in Design*

- High-resolution imaging and patterns for realistic wood visuals
- New tile visuals that mirror woven patterns

### *Durable Technology*

- PUR double coating improves resistance to scratches and stains
- Quality assured by warranties

### *Excellent resistance to water*

DecoTile has a strong resistance against water.  
(No swelling, no distortion)

# GRAND TETON CONTENTS

※ Colors can be different from samples/index. Please check the actual product.  
※ Applying the natural characters of woods/stones with diverse colors and visuals.

## PLANK



1230  
DISTRESSED OAK



1231  
VENETIAN GREY OAK



2736  
ENGLISH OAK



1237  
SALVADOR WALNUT



1203  
KENSINGTON OAK



1227  
WARM WHITE OAK



2737  
AGUSTA BROWN



2738  
PARISIAN OAK

## TILE



1709  
BROWN MARBLE



1713  
DARK GREY MARBLE




1710 RED BRICK MARBLE  
1712 SOFT GREY MARBLE

# PLANK


1230  
DISTRESSED  
OAK



1231  
VENETIAN  
GREY OAK

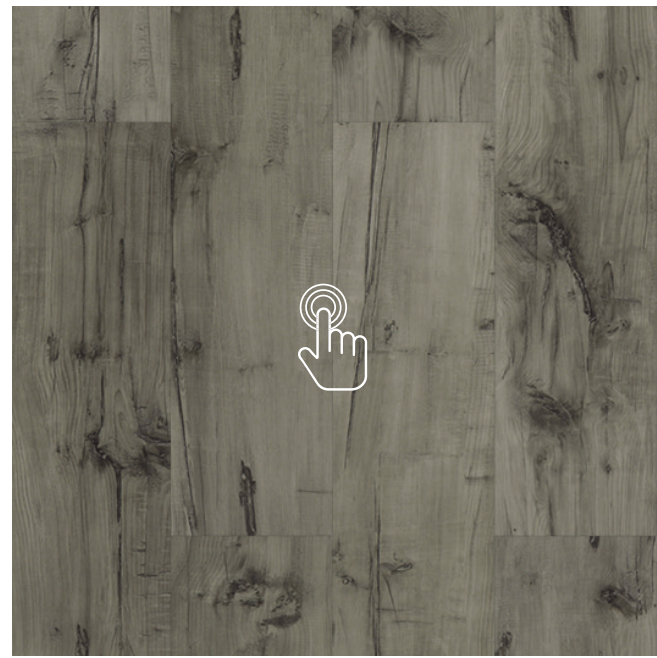

2736  
ENGLISH OAK

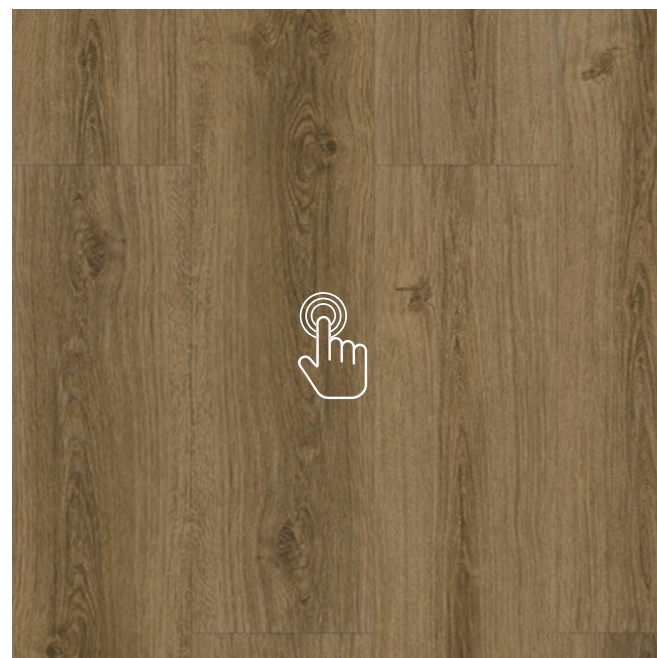

1230 / DISTRESSED OAK

# PLANK


1230  
DISTRESSED  
OAK



1231  
VENETIAN  
GREY OAK



2736  
ENGLISH OAK

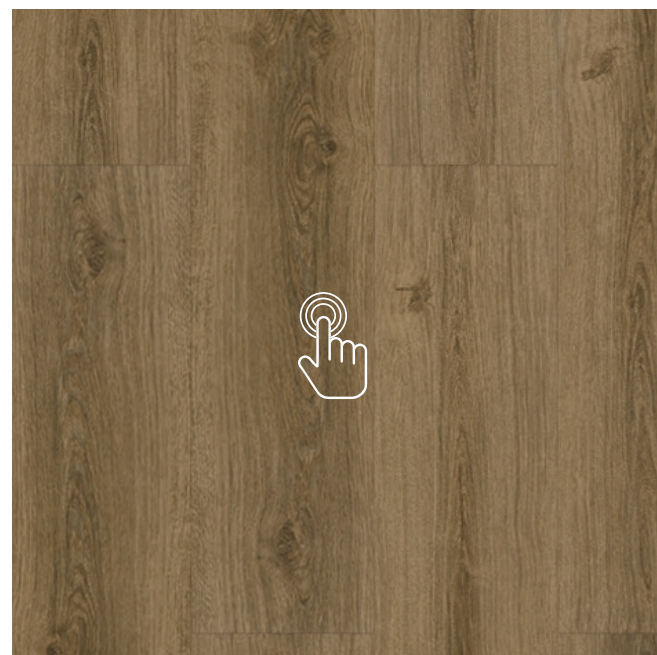


1231 / VENETIAN GREY OAK

PLANK

1230  
DISTRESSED  
OAK



1231  
VENETIAN  
GREY OAK

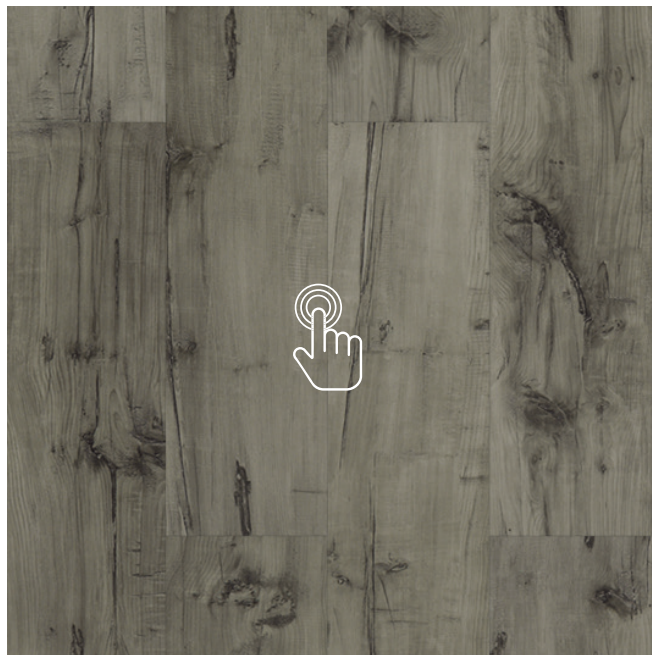

2736  
ENGLISH OAK



2736 / ENGLISH OAK

# PLANK

1237  
SALVADOR  
WALNUT



1203  
KENSINGTON  
OAK




1227  
WARM WHITE  
OAK



1237 / SALVANDOR WALNUT

# PLANK

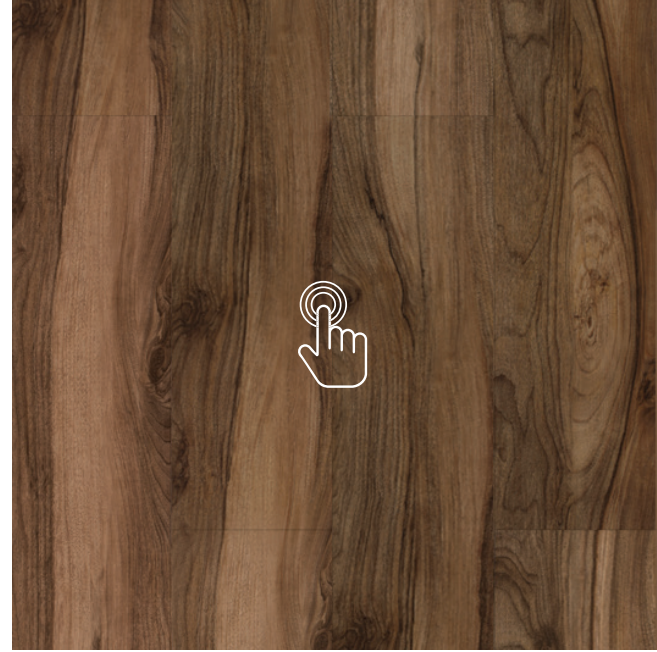

1237  
SALVADOR  
WALNUT



1203  
KENSINGTON  
OAK




1227  
WARM WHITE  
OAK



1203 / KENSINGTON OAK



# PLANK

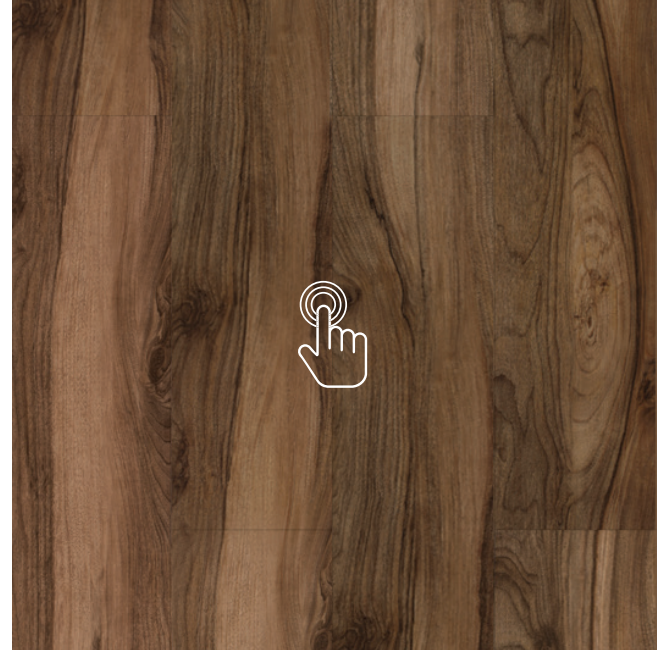

1237  
SALVADOR  
WALNUT



1203  
KENSINGTON  
OAK



1227  
WARM WHITE  
OAK




1227 / WARM WHITE OAK

# PLANK

2737  
AGUSTA  
BROWN



2738  
PARISIAN  
OAK

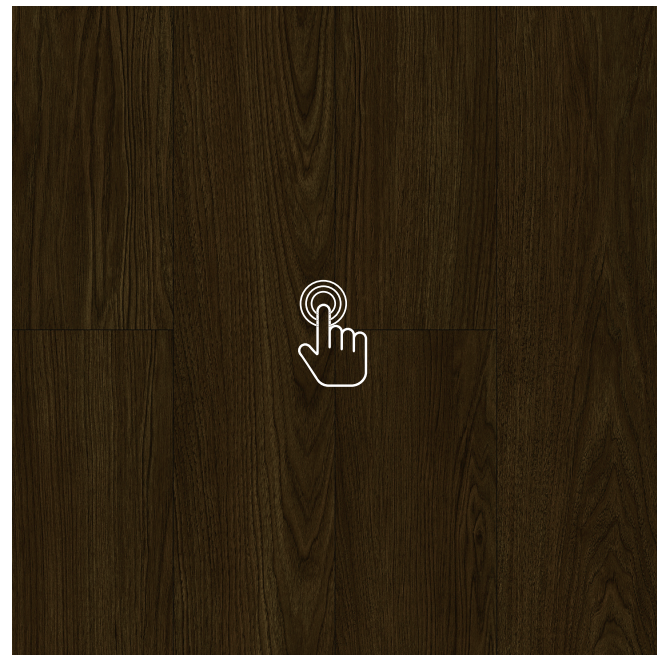


2737 / AGUSTA BROWN

# PLANK

2737  
AGUSTA  
BROWN




2738  
PARISIAN  
OAK

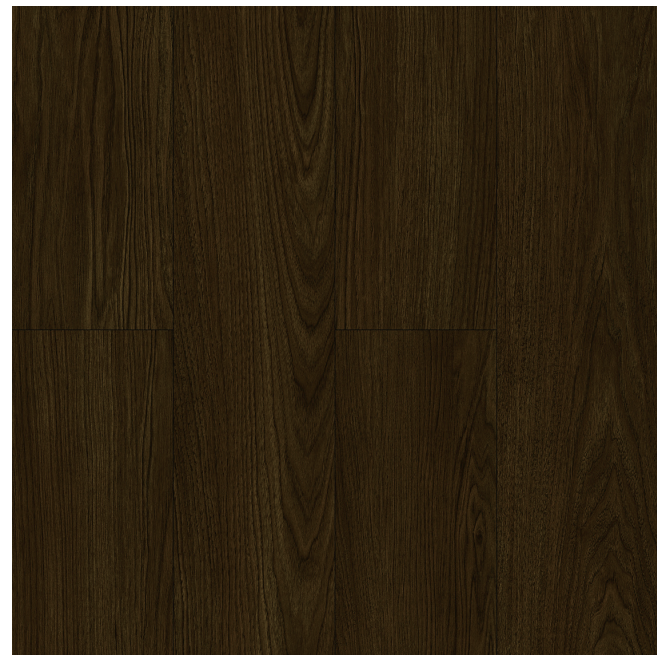

2738 / PARISIAN OAK


# TILE

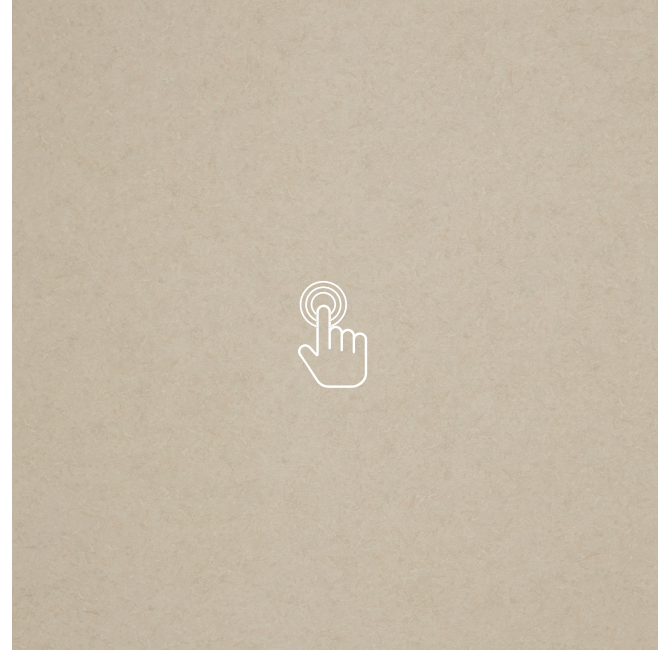

1709  
BROWN  
MARBLE



1713  
DARK GREY  
MARBLE

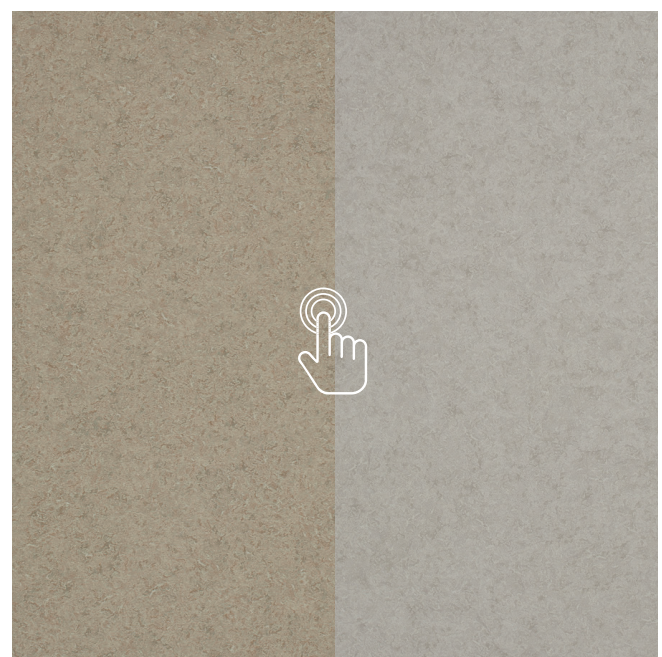


1710  
RED BRICK  
MARBLE

1712  
SOFT GREY  
MARBLE



1709 / BROWN MARBLE

# TILE

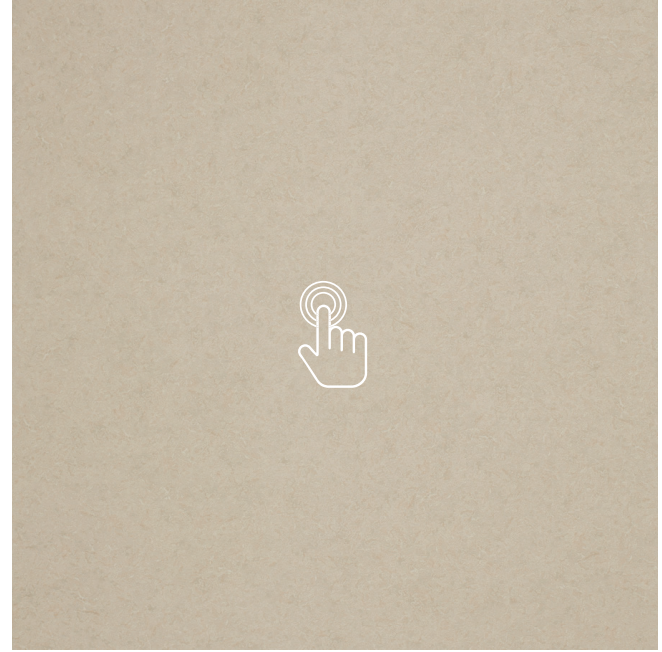

1709  
BROWN  
MARBLE



1713  
DARK GREY  
MARBLE




1710  
RED BRICK  
MARBLE

1712  
SOFT GREY  
MARBLE




1713 / DARK GREY MARBLE

TILE

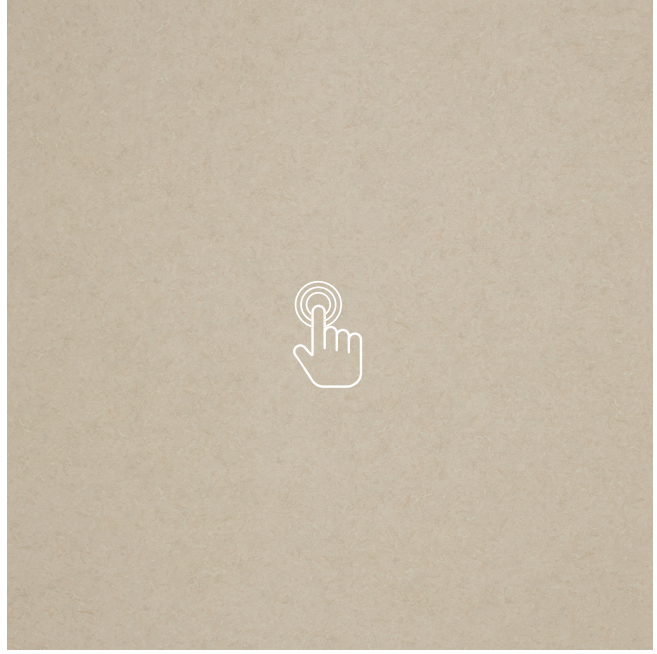

1709  
BROWN  
MARBLE

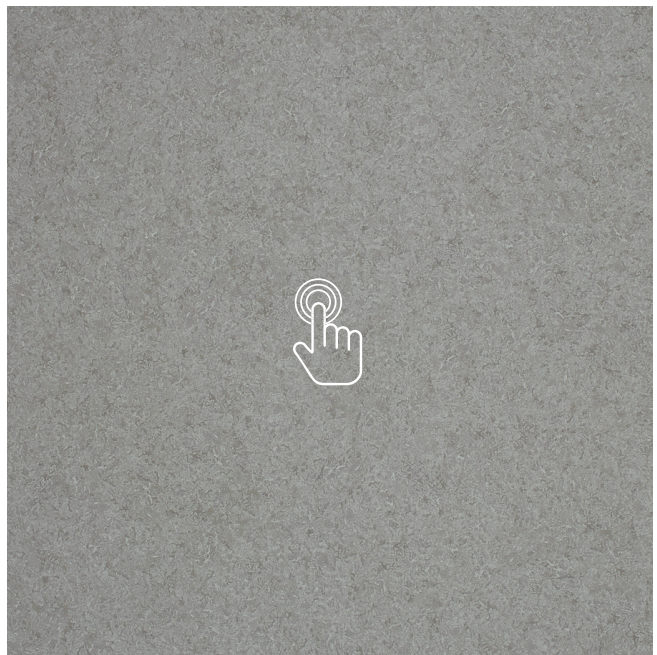

1713  
DARK GREY  
MARBLE



1710  
RED BRICK  
MARBLE

1712  
SOFT GREY  
MARBLE



1710 / RED BRICK MARBLE  
1712 / SOFT GREY MARBLE

# LX HAUSYS Floors 2.5mm/12mil Dryback Specification



## TECHNICAL DATA

|  |  |                               |
|--|--|-------------------------------|
| <b>COLLECTION NAME</b>                                   | Grand Teton  |                               |
| <b>SELLING STYLE #(s)</b>                                | Grand Teton  |                               |
| <b>TOTAL # SKU'S(COLORS)</b>                             | 12 (Plank 8, Tile 4)                                 |                               |
| <b>PRODUCT SPECIFICATIONS / CONTENT / CERTIFICATIONS</b> | <b>DETAILS</b>                                       | <b>ADDITIONAL INFORMATION</b> |
| Thickness  | 2.5mm (0.098 in)                                     |                               |
| Wear Layer   | 12mil (0.3mm)  |                               |
| Glass Fiber  | No   |                               |
| Finishing / Coating                                      | Enhanced UV Urethane Coating                         |                               |
| Nominal Dimensions (inches)                              | Plank(6" x 48"), Tile(18" x 18")                     |                               |
| Actual Dimensions (inches & mm)                          | Plank(150mm x 1200mm), Tile(450mm x 450mm)           |                               |
| Micro-Beveled  | No   |                               |
| Class / ASTM F1700                                       | Class III Printed Film vinyl tile - Type B(embossed) |                               |
| Backing Class  | Commercial Grade                                     |                               |
| Gloss Level  | 5~12   |                               |
| Commercial Traffic                                       | Light Commercial                                     |                               |
| Added Antimicrobial                                      | No   |                               |
| Recycled Contents  | 100% Virgin Vinyl                                    |                               |
| Backstamp info   | None   |                               |
| CE Certification   | Yes  |                               |



# LX HAUSYS Floors 2.5mm/12mil Dryback Specification

## TECHNICAL DATA




| PACKING SPEC'S                             | DETAILS                  |                          | ADDITIONAL INFORMATION |
|--|--------------------------|--------------------------|------------------------|
|  | Plank(6"x 48")           | Tile(18" x 18")          |                        |
| Pallet Dimensions (L x W x H)              | 1,260 x 1,010 x 157 (mm) | 1,000 x 1,000 x 144 (mm) |                        |
| Square feet per plank/tile [formula field] | 1.94                     | 2.18                     |                        |
| Square feet per carton                     | 42.63                    | 41.41                    |                        |
| Square feet per pallet                     | 2,558.00                 | 2,154.00                 |                        |
| Square feet per container [formula field]  | 40,920.00                | 38,764.00                | 20 foot container      |
| Weight per sq ft(lbs) [formula field]      | 0.91                     | 0.91                     |                        |
| Weight per plank/tile (lbs/plank)          | 1.77                     | 1.98                     |                        |
| Weight per carton (lbs)                    | 38.81                    | 37.70                    |                        |
| Weight per pallet (lbs)                    | 2,395.05                 | 2,027.23                 |                        |
| Weight per container (lbs)                 | 38,320.81                | 36,490.12                |                        |
| Pieces per box                             | 22                       | 19                       |                        |
| Boxes per pallet                           | 60                       | 52                       |                        |
| Box Type                                   |                          |                          |                        |
| Pallet per container                       | 16                       | 18                       |                        |
| Boxes per container [formual field]        | 960                      | 936                      |                        |



# LX HAUSYS Floors 2.5mm/12mil Dryback Specification

## TECHNICAL DATA



| PRODUCT PERFORMANCE / TESTING   | PERFORMANCE        | ASTM REQUIREMENT                          |
|---------------------------------|--------------------|---|
| ASTM F2055 Size and Tolerance   | Passes             | As speicfied 0.016 in./lin.ft             |
| ASTM F386 Thickness             | Passes             | As speicfied 0.005 in./lin.ft             |
| ASTM F2055 Squareness           | Passes             | Max. 0.010 in.                            |
| ASTM F1914 Residual Indentation | Passes             | Avg. < 8%                                 |
| ASTM F137 Flexibility           | Passes 6mm mandrel | 1 in (25.4mm) mandrel / no crack or break |
| ASTM F2199 Dimension Stability  | Passes             | < 0.020in./ft                             |
| ASTM F925 Chemical Resistance   | Passes             | No change/Slight change                   |
| ASTM F1514 Resistance to Heat   | Passes             | < 8 (delta E) avg.                        |
| ASTM F1515 Resistance to Light  | Passes             | < 8 (delta E) avg.                        |
| ASTM E648 Critical Radiant Flux | Class 1            | Class 1 ( < 0.45 W/cm <sup>2</sup> )      |
| ASTM E662 Optical Smoke Density | Passes             | < 450                                     |
| ASTM C1028 Slip Resistance      | Passes             | ADA Compliant( > 0.50)                    |
| ASTM F970 Static Load           | 1000 psi           | 250 psi( < 0.005")                        |

| TECHNICAL INFORMATION / DOCUMENTS | DETAILS                      | ADDITIONAL INFORMATION |
|-----------------------------------|------------------------------|------------------------|
| Product Warranty                  | 7 years for Ligth commercial |                        |
| Installation Method               | Full spread                  |                        |
| Approved Installation Methods     | Above, Below, and On-Grade   |                        |
| Recommended Adhesive(s)           | Any approved LVT adhesive    |                        |
| Polished Required (Y/N)           | None                         |                        |

# GRAND TETON

---



[www.lxhausys.com](http://www.lxhausys.com)

For more information, Go to Website

 **LX Hausys**

Copyright © LX Hausys All rights reserved.