


NATURAL SELECTION

NATURAL SELECTION

Commercial and Residential Flooring

Hospital, Retail, School, House, Office, Cafe, Restaurant, Department Store


BASIC CONSTRUCTION

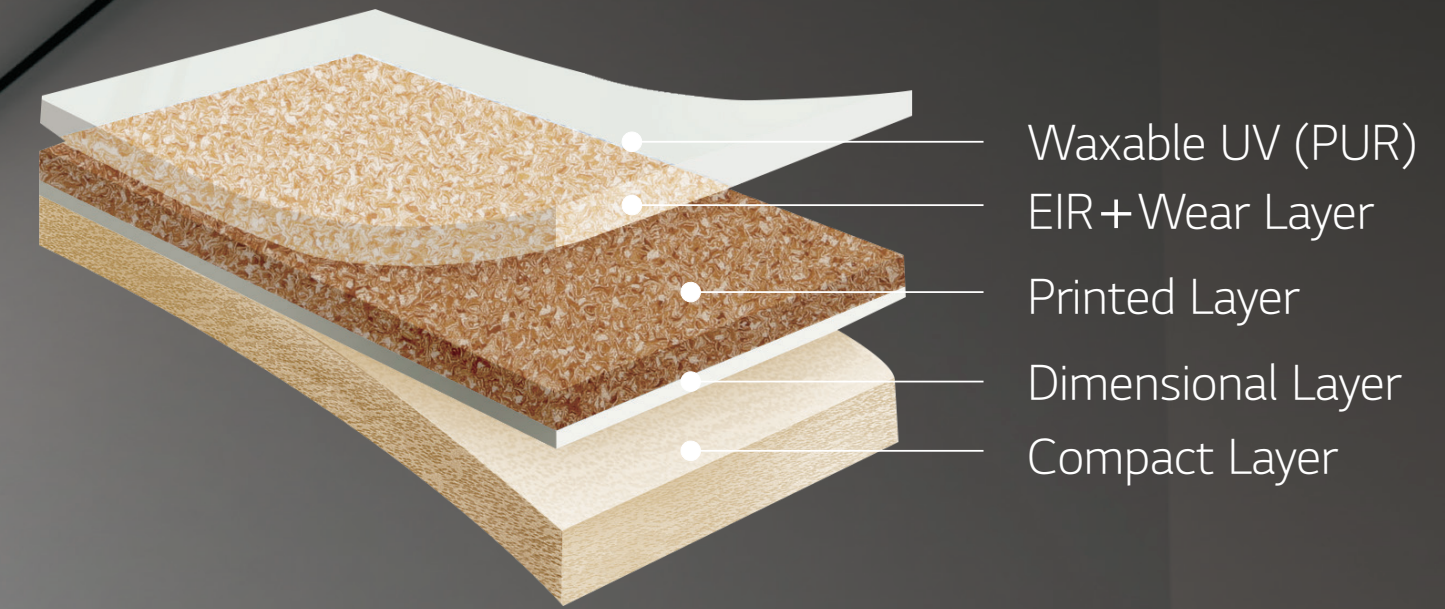

FEATURE

Embossing Technique

Our new advanced E.I.R technology enables a wood visual that looks and feels more real than actual wood creating a natural and elegant space.



- Dimensional stabilities due to optimized temperature & tension technology applied on the Calendering process of LX Hausys.
- Dimensionally unstable products may result in gaps between sheets after installation. These gaps could trap dirt and multiply bacteria.

NATURAL SELECTION

INDEX

 LX HAUSYS Floors 2.2mm/20mil Heterogeneous Sheet

※ Colors can be different from samples/index. Please check the actual product.
※ Applying the natural characters of woods/stones with diverse colors and visuals.

SHEET



3234 PAINTED DRUM OAK




3235 FADED DRUM OAK




3237 VINTAGE GREY OAK




3236 NATURAL DRUM OAK

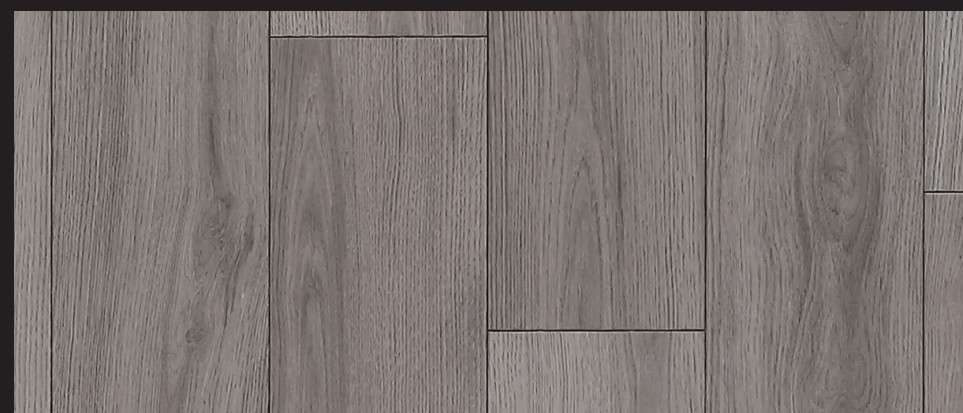


3246 WASHED GREY OAK

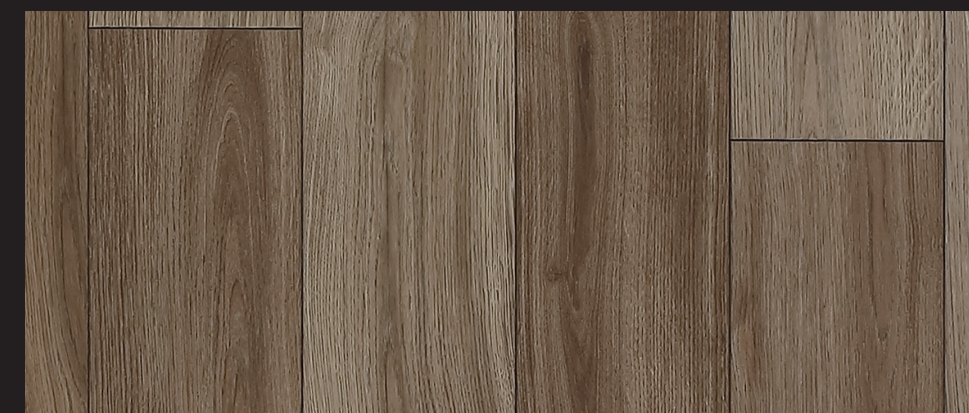

3247 BROWN TAMED OAK

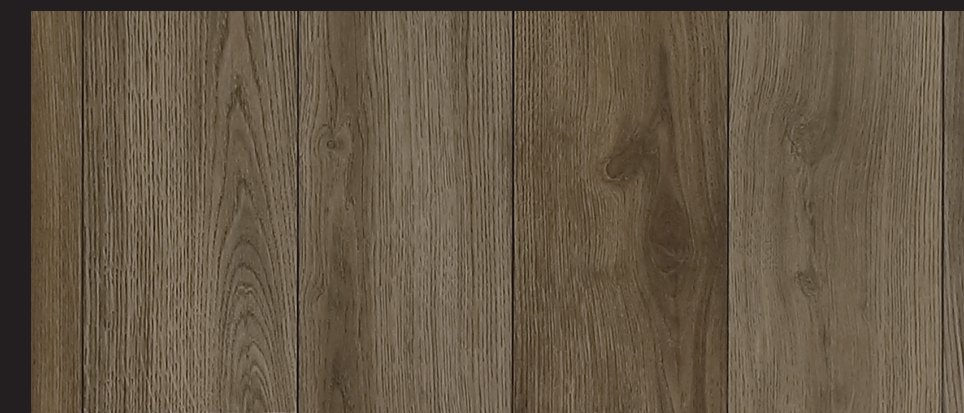

3248 NATURAL LIGHT OAK

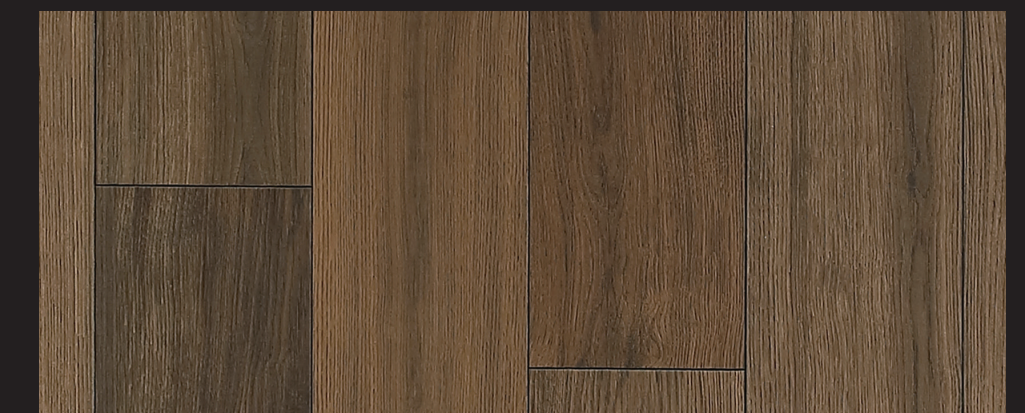

3249 RED BARN OAK

NATURAL SELECTION

3234 PAINTED DRUM OAK



3235 FADED DRUM OAK



3237 VINTAGE GREY OAK



NATURAL SELECTION



3234 PAINTED DRUM OAK



3235 FADED DRUM OAK

3237 VINTAGE GREY OAK



NATURAL SELECTION



3234 PAINTED DRUM OAK



3235 FADED DRUM OAK

3237 VINTAGE GREY OAK



NATURAL SELECTION

3236 NATURAL DRUM OAK



3246 WASHED GREY OAK



3247 BROWN TANED OAK



NATURAL SELECTION



3236 NATURAL DRUM OAK

3246 WASHED GREY OAK



3247 BROWN TANED OAK



NATURAL SELECTION



3236 NATURAL DRUM OAK



3246 WASHED GREY OAK

3247 BROWN TANED OAK



NATURAL SELECTION

3248 NATURAL LIGHT OAK



3249 RED BARN OAK



NATURAL SELECTION



3248 NATURAL LIGHT OAK

3249 RED BARN OAK



NATURAL SELECTION

LX HAUSYS Floors 2.2mm/20mil Heterogeneous Sheet

TECHNICAL DATA

COLLECTION NAME	Natural selection	
SELLING STYLE #(s)	Natural selection	
TOTAL # SKU'S(COLORS)	8	
PRODUCT SPECIFICATIONS / CONTENT / CERTIFICATIONS	DETAILS	ADDITIONAL INFORMATION
Thickness	0.086in. , 2.2mm	
Wear Layer	20mil(0.02 in) , 0.5mm	
Glass Fiber	Yes	
Finishing / Coating	Waxable	
Nominal Dimensions (inches)	78 in wide , 68 ft ong	
Actual Dimensions (inches & mm)	Width : 78.75in , 2m / length : 68.58ft , 20.90 m	
Micro-Beveled	No	
Class / ASTM F1303	Type I, Grade I	
Backing Class	4-ply fused backing system, Class B	
Gloss Level	6~10	
Commercial Traffic	Heavy Commercial	
Added Antimicrobial	Yes	
Recycled Contents	100% Virgin Vinyl	
Backstamp info	None	
CE Certification	Yes	



NATURAL SELECTION

LX HAUSYS Floors 2.2mm/20mil Heterogeneous Sheet

TECHNICAL DATA

PACKING SPEC'S	DETAILS	ADDITIONAL INFORMATION
Pallet Dimensions (L x W x H) / H: 2100mm	① 1200*910mm ② 910*910mm	
CARTONS / PALLET / CONTAINER	① 1200*910mm : 12Rolls/Pallet ② 910*910mm : 9Rolls/Pallet	
PALLETS PER CONTAINER	10 Pallets	20 foot container
SQYD PER ROLL	50SQYD	
SQYD PER PALLET	① 1200*910mm : 600SQYD ② 910*910mm : 450SQYD	
WEIGHT PER ROLL	337.7LBS/Roll	
WEIGHT PER PALLET (PALLET WEIGHT)	① 1200*910mm : 4,052.9LBS/Pallet ② 910*910mm : 3,039.7LBS/Pallet	
ROLL WRAPPING PAPER TYPE	Craft paper with pefoam Wrapping(PP Coating)	



NATURAL SELECTION

LX HAUSYS Floors 2.2mm/20mil Heterogeneous Sheet

TECHNICAL DATA

PRODUCT PERFORMANCE / TESTING	PERFORMANCE	ASTM REQUIREMENT
ASTM D2047 Slip Resistance	>0.65 (wet, dry)	static coefficient of friction > 0.6 (ADA) * > 0.5OSHA
ASTM F970 Static Load	>1500psi	Max 0.005"
ASTM F1914 Residual Indentation	passes < 8%	Average less than 8%, maximum single reading 10%
ASTM F137 Flexibility	passes	No crack or brack
ASTM F925 Chemical Resistance	passes	more than slight change
ASTM F1514 Resistance to Heat	passes	$\Delta E < 8$
ASTM F1515 Resistance to Light	passes	$\Delta E < 8$
ASTM E648 Critical Radiant Flux	passes	>0.45watts/cm ² , NFPA Class I , Class II ³ 2.2 kW /m ²
ASTM E662 Optical Smoke Density	passes < 450	<450 in flaming and non flaming mode
TECHNICAL INFORMATION / DOCUMENTS		
Product Warranty	10 years for Commercial	
Installation Method	Full spread	
Approved Installation Methods	Glue down	
Recommended Adhesive(s)	Any approved Commerical Sheet adhesive	
Polished Required (Y/N)	None	



NATURAL SELECTION



www.lxhausys.com

For more information, Go to Website

 **LX Hausys**

Copyright © LX Hausys All rights reserved.