

REAL PRESTIGE PRESTIG

PERFECTING THE DETAILS
OF NATURAL WOOD AND FINE STONES.

The premium flooring PRESTG feature

LX Hausys' unrivaled technolog

and design philosophy by reproducing and maintaining

the beauty of the original texture

and look of high quality woods and stones to given a valued experience.



MORE BEAUTIFUL THAN NATURE

TG interweaves natural beauty with cutting edge design technology to create beautiful and natural environments for your space.

Unlimited experiences are created according to the function intent of your business space.



TIMELESS DURABILITY

PRESTG is constructed from LX's state of the art technology which preserves the everlasting beauty of the product and improves durability.





CONVENIENT FLOORING PRESTG CLICK

By utilizing LX's Rigid Core technology and sophisticated processing skills, PRESTG Click provides ease and comfor with installation that requires no adhesive.



LX Hausys' exclusive continuous embossing technique enables the realistic expression of unique textures and patterns found in woods and stones. Diverse color variations and the detailed reality of beauty is expressed through our "big size" design which is twice as large as conventional LVT flooring.

CONTINUOUS EMBOSSED IN REGISTER "C-EIR"

The authentic texture of wood and ceramic materials are generated by applying LX Hausys' continuous embossed in register technique, and through LX's random dye-cut system, diverse patterns and rich textures are beautifully expressed.



C-EIR : Continuous Embossed in Register

A technique that realistically expresses the texture of natural materials by matching the prints and surface embossing continuosly and reducing repetitiveness.













LX Hausys' exclusive continuous embossing technique enables the realistic expression of unique textures and patterns found in woods and stones. Diverse color variations and the detailed reality of beauty is expressed through our "big size" design which is twice as large as conventional LVT flooring.

COLOR VARIATION

Unlike the simple colors of conventional LVT flooring, PRESTG applies the diversity of color in natural materials to create a more luxurious and beautiful space.



Conventional deco tile

PRESTG









Diverse color range



LX Hausys' exclusive continuous embossing technique enables the realistic expression of unique textures and patterns found in woods and stones. Diverse color variations and the detailed reality of beauty is expressed through our "big size" design which is twice as large as conventional LVT flooring.

BIG SIZE DESIGN

By doubling the pattern size of conventional flooring, PRESTG is able to express large, beautiful wood visuals.



Conventional deco tile: $3.0 \text{mm}(T) \times 180 \text{mm}(W) \times 920 \text{mm}(L)$

Approx. 2 times UP



PRESTG WOOD: 5.0mm(T) × 228.6mm(W) × 1523mm(L)











LX Hausys' exclusive continuous embossing technique enables the realistic expression of unique textures and patterns found in woods and stones. Diverse color variations and the detailed reality of beauty is expressed through our "big size" design which is twice as large as conventional LVT flooring.

HIGH-RESOULTION REALITY IMAGE

Free from the limitations of conventional printing methods, high-resolution photo quality printing is applied to elaborately express the reality of the material.



Conventional product

PRESTG (High-resolution design)











TIMELESS DURABILITY PRESTG

Direct installation over existing flooring minimizes cost and time; in addition, the natural beauty of our product is prolonged through our unique Transfer Guard technology. Our high-strength surface coating improves the prevention of scratches to retain the value of any space.


TRANSFER GUARD (PREVENTS FLOOR TRANSFER)

Our transfer guard technology prevents the visual transferring of scrape marks and floor curling that can occur after installation.

[CASTOR CHAIR TEST] ISO 4918



90kg Castor chair test performed to check for flooring breaks and

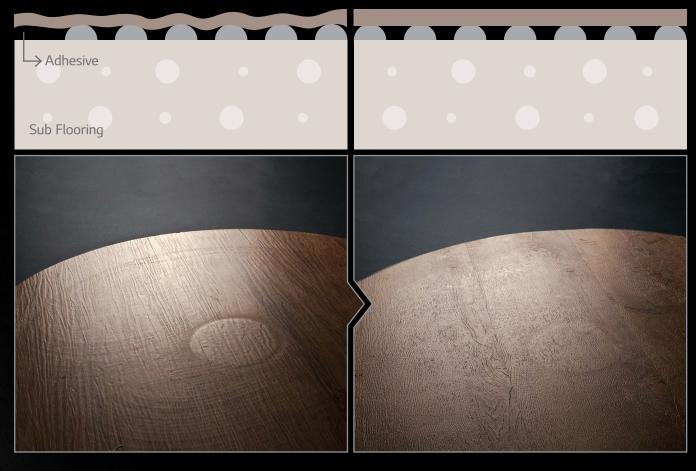

and tranfer after rotating 3000 times X Tested at LX Hausys Research Center

of 25,000 times



TIMELESS DURABILITY PRESTG

Direct installation over existing flooring minimizes cost and time; in addition, the natural beauty of our product is prolonged through our unique Transfer Guard technology.

Our high-strength surface coating improves the prevention of scratches to retain the value of any space.

SMART INSTALLATION

One-Day

PRESTG can be fitted directly over existing flooring which shortens the installation period to one day.

Mix & Match

Mixed installation with various materials, including carpet tiles, is possible due to the elevated thickness of this product.

- Uneven floors will be installed after a self-leveling procedure
- Gaps and breaks in the existing flooring requires filling/ repairing
 Can only be installed over decotiles and mineral flooring
 that is fixed to the subfloor
- Installation time can vary according to environment and space



One-Day installation

Mix & Match installation



TIMELESS DURABILITY PRESTG

Direct installation over existing flooring minimizes cost and time; in addition, the natural beauty of our product is prolonged through our unique Transfer Guard technology.

Our high-strength surface coating improves the prevention of scratches to retain the value of any space.

STONE SHIELD (HIGH-STRENGTH SURFACE COATING)

Dual coating of high density finishing containing stone particles that create an exceptional anti-scratch performance.

[MARTINDALE TEST] EN16094 : 2012



Tested with 320 rotations on the product with a strength of 4N with a scratch pad (scotch Brite Fleece SB7440)



Conventional deco tile: B5

PRESTG: B1~2

B1 = No scratches / B2 = Almost no scratches / B3 = Moderate
B4 = Many scratches / B5 = Complex scratches in every direction.
※ Tested at LX Hausys Research Center





5G Click method shortens the installation time and strengthens the coherence.
The amazing technology of LX Hausys reduces noise and improves stability to optimize walking safety.

STRUCTURE / SPEC

ESTG GLUEDOWN _ STONE / WOOD

High-strength surface coating (Stone Shield)

High-durability embossing transparent layer (C-EIR Wear Layer)

High-resolution design

Transfer prevention (Transfer Guard)

Natural stone composite layer (Stone Polymer Composite)

Transfer prevention / Balance layer (Transfer Guard)

| Pattern | Classification | Specification | Packing |
|-----------------|----------------|------------------------------|----------------------|
| STONE VISUAL | PTS | 5(T) X 600(W) X 600(L) mm | 5pcs/Box (1.80m²) |
| WOOD VISUAL | PSW | 5(T) X 228.6(W) X 1523(L) mm | 6pcs/Box (2.09m²) |



CONVENIENT FLOORING PRESTG CLICK

5G Click method shortens the installation time and strengthens the coherence.
The amazing technology of LX Hausys reduces noise and improves stability to optimize walking safety.

PRESTG Click Feature



No transfer of florr curves with Rigid Core Board laye



Excellent stability due to foam layer.



Lightweight impact sounds reduced by 19dB. (ISO 717-2:2013, LX Hausys Tested)



Shortened installation time and maximized coherence by applying Valinge 5G Click structure.




Our click structure allows for a floating floor installation where flooring is installed over the existing floor and can be restored to the original state when removed.



No deformation from water.

STRUCTURE / SPEC PRESTG _ CLICK 🖆

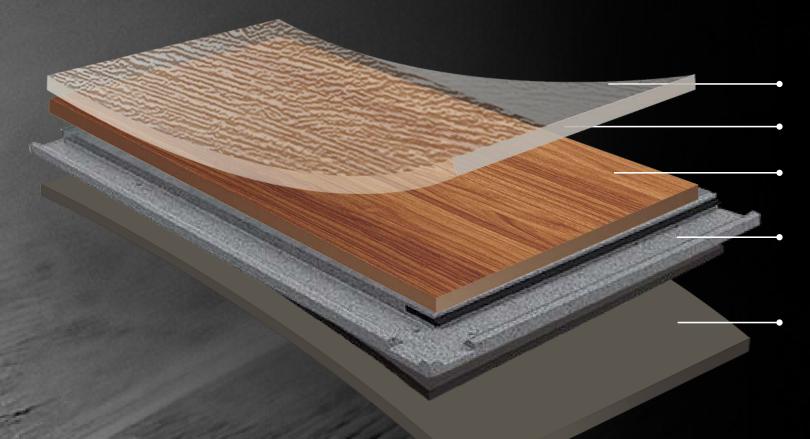

High-strength surface coating (Stone Shield)

High-durability embossing transparent layer (C-EIR Wear Layer)

High-resolution design

Rigid Core Board (5G Click)


Noise reduction (1.5mm T Foam)

| Pattern | Classification | Specification | Packing |
|-----------------|----------------|----------------------------|-----------------------|
| STONE VISUAL | PTC | 6(T) X 310(W) X 605(L) mm | 10pcs/Box (1.88m²) |
| WOOD VISUAL | PCW | 6(T) X 150(W) X 1220(L) mm | 10pcs/Box (1.83m²) |

PARQUET WOOD C-EIR

PTS6902 **600 X 600mm**







PTS6901 600 X 600mm











PARQUET WOOD C-EIR

PTS6902 **600 X 600mm**



PTS6903 **600 X 600mm**

PTC6903
310 X 605mm

PTS6901 600 X 600mm

PTC6901
310 X 605mm









PARQUET WOOD C-EIR

PTS6902 600 X 600mm







PTS6901 600 X 600mm







CRACK CONCRETE C-EIR

PTS6905 600 x 600mm



PTS6906 600 x 600mm

T PTC6906 310 x 605mm

600 x 600mm



PTS6904






CRACK CONCRETE C-EIR

PTS6905 600 x 600mm



PTC6906 310 x 605mm

600 x 600mm

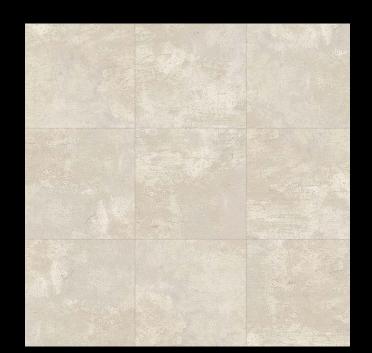



PTS6904





CRACK CONCRETE C-EIR

PTS6905 600 x 600mm

T PTC6905 310 x 605mm



PTS6906

PTC6906 310 x 605mm



310 x 605mm



BIANCO

PTS6917 600 x 600mm





PTS6918 600 x 600mm





BIANCO

PTS6917 600 x 600mm





PTC6918
310 X 605MM








ONYX MARBLE

PTS6915 600 X 600mm











ONYX MARBLE

PTS6915 600 X 600mm



PTS6916 600 X 600mm







RUSTIC STEEL

PTS6907 600 x 600mm















RUSTIC STEEL

PTS6907 600 x 600mm







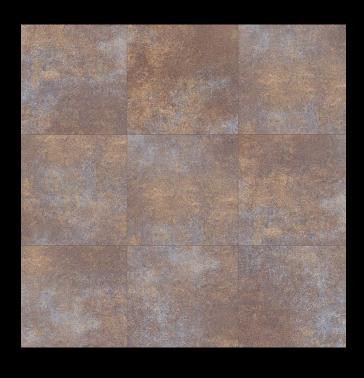







PTS6909 600 x 600mm

PTC6909
310 x 605mm

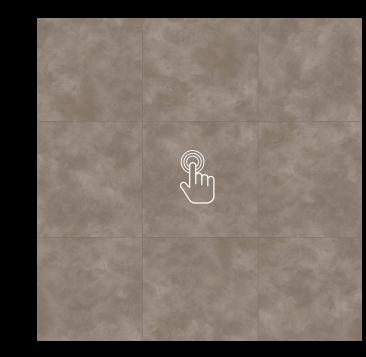


PTS6910 600 x 600mm





PTS6911 600 x 600mm

PTC6911
310 x 605mm

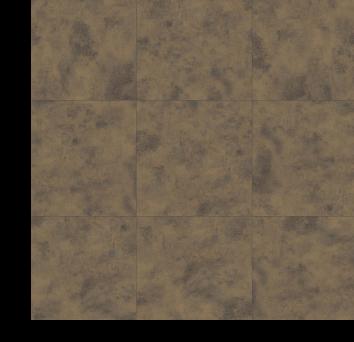

PTS6912 600 x 600mm








PTS6909 600 x 600mm

PTC6909
310 x 605mm

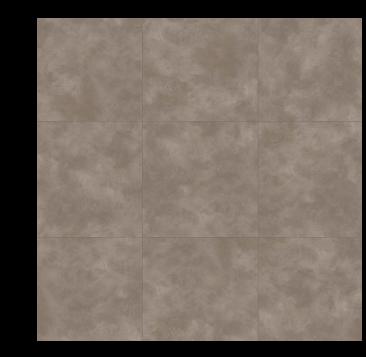

PTS6910 600 x 600mm

PTC6910 310 x 605mm



PTS6911 600 x 600mm

PTC6911
310 x 605mm



PTS6912 600 x 600mm


PTC6912 310 x 605mm






PTS6909 600 x 600mm



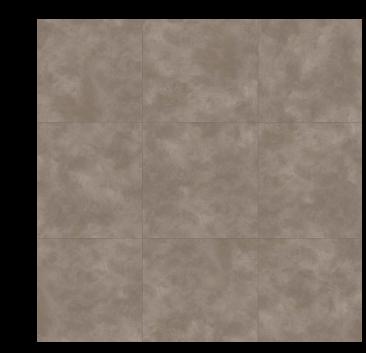

PTS6910 600 x 600mm





PTS6911 600 x 600mm





PTS6912 600 x 600mm









PTS6909 600 x 600mm



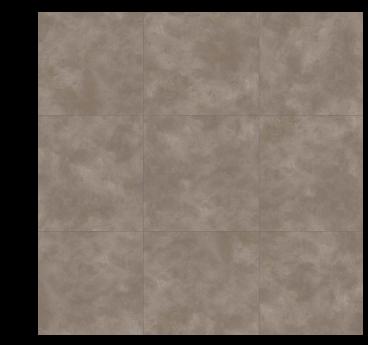

PTS6910 600 x 600mm





PTS6911 600 x 600mm





PTS6912 600 x 600mm

PTC6912
310 x 605mm






PEARL CONCRETE

PTS6913 600 x 600mm















PEARL CONCRETE

PTS6913 600 x 600mm







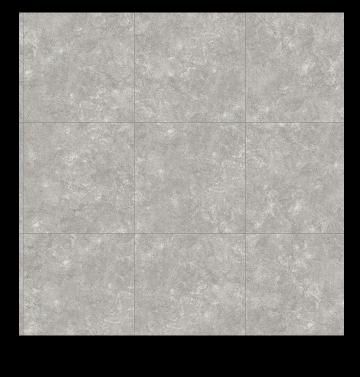





SALTLAKE OAK C-EIR



PSW7901 228.6 x 1523mm



PSW7902 228.6 x 1523mm









SALTLAKE OAK C-EIR

PSW7901 228.6 x 1523mm



PSW7902 228.6 x 1523mm









PSW7903 228.6 x 1523mm







PSW7905 228.6 x 1523mm













PSW7903 228.6 x 1523mm





PCW7904 150 x 1220mm

PSW7905 228.6 x 1523mm
















PSW7903 228.6 x 1523mm








PSW7905 228.6 x 1523mm




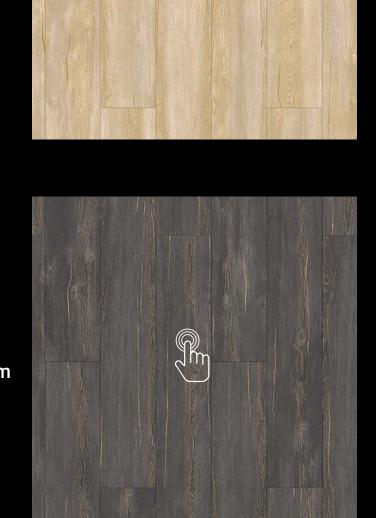



CRACK OAK C-EIR


PSW7906 228.6 x 1523mm





PCW7907 150 x 1220mm

PSW7908 228.6 x 1523mm











CRACK OAK C-EIR


PSW7906 228.6 x 1523mm





PCW7907 150 x 1220mm

PSW7908 228.6 x 1523mm











CRACK OAK C-EIR

PSW7906 228.6 x 1523mm



PSW7907 228.6 x 1523mm

PCW7907 150 x 1220mm

PSW7908 228.6 x 1523mm











WEATHERED PINE C-EIR



PSW7910 228.6 x 1523mm













PSW7910 228.6 x 1523mm











PSW7911 228.6 x 1523mm





PSW7912 228.6 x 1523mm





PSW7913 228.6 x 1523mm





PSW7914 228.6 x 1523mm

PCW7914 150 x 1220mm






PSW7911 228.6 x 1523mm





PSW7912 228.6 x 1523mm





PSW7913 228.6 x 1523mm





PSW7914 228.6 x 1523mm








PSW7911 228.6 x 1523mm





PSW7912 228.6 x 1523mm





PSW7913 228.6 x 1523mm

PCW7913 150 x 1220mm



PSW7914 228.6 x 1523mm








PSW7911 228.6 x 1523mm





PSW7912 228.6 x 1523mm





PSW7913 228.6 x 1523mm





PSW7914 228.6 x 1523mm







WASHED OAK C-EIR

PSW7916





PSW7915 228.6 x 1523mm

PCW7915 150 x 1220mm





WASHED OAK C-EIR

PSW7916 228.6 x 1523mm






PCW7915 150 x 1220mm







STONE Collection

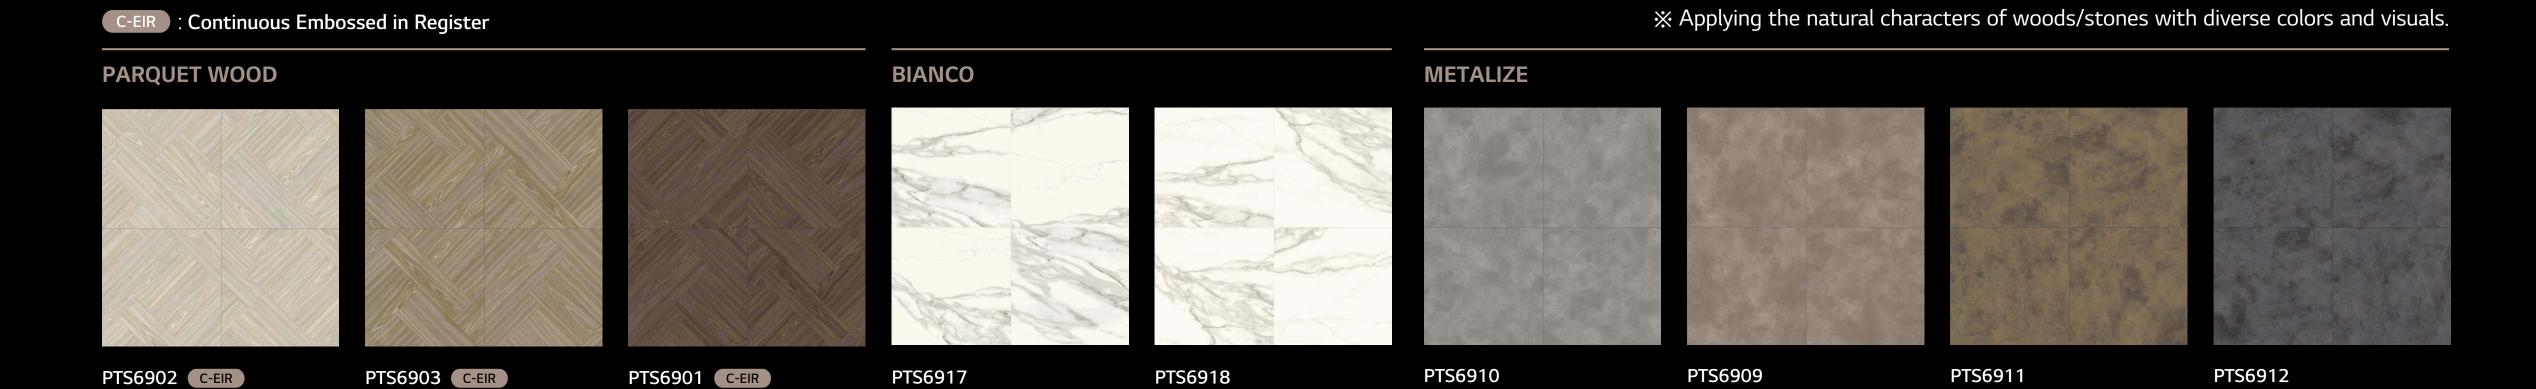

X Colors can be different from samples/index. Please check the actual product.

CRACK CONCRETE FEARL CONCRETE RUSTIC STEEL PTS6905 CER PTS6904 CER PTS6915 PTS6916 PTS6913 PTS6914 PTS6907 PTS6908

WOOD Collection

C-EIR : Continuous Embossed in Register

SALTLAKE OAK

* Colors can be different from samples/index. Please check the actual product. * Applying the natural characters of woods/stones with diverse colors and visuals.

TREASURE OAK



PSW7908 C-EIR









WASHED OAK





PSW7914 C-EIR

CRACK OAK

PSW7903 C-EIR

PSW7907 **C-EIR**

PINE





PSW7906 C-EIR













www.lxhausys.com



Copyright © LX Hausys All rights reserved.