


# PIKE'S PEAK

# PIKE'S PEAK

## Basic Construction

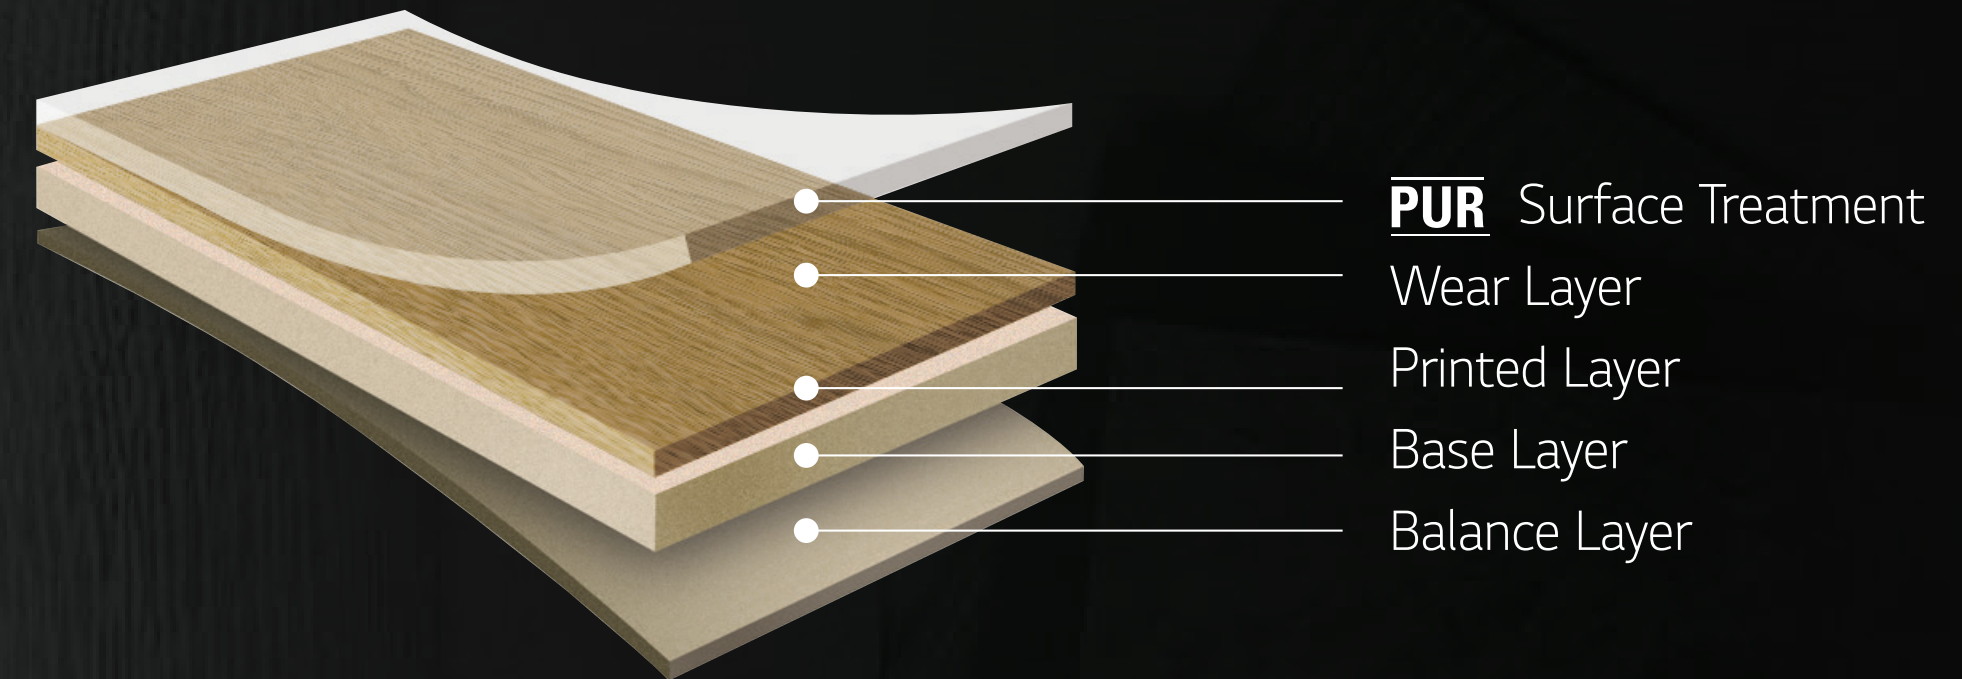

## Features

### *Eco & Human-friendly Product*

- FloorScore® and DIBt certified for low VOCs
- Phthalate Free(DEHP·DBP·BBP·DIDP·DINP·DNOP)  
& Heavy Metal Free(Cd·Pb·Hg·Cr6+)
- Made from safer, stronger 100% virgin raw materials

### *Excellence in Design*

- High-resolution imaging and patterns for realistic wood visuals
- New tile visuals that mirror woven patterns

### *Durable Technology*

- PUR double coating improves resistance to scratches and stains
- Quality assured by warranties

### *Excellent resistance to water*

DecoTile has a strong resistance against water.  
(No swelling, no distortion)

# PIKE'S PEAK CONTENTS

※ Colors can be different from samples/index. Please check the actual product.  
※ Applying the natural characters of woods/stones with diverse colors and visuals.

## PLANK



1360  
GREY WALNUT



1361  
BARN OAK



1362  
FEATHERED OAK



1363  
GREY HICKORY



1364  
ASH GREY OAK



1365  
GOLDEN BROWN OAK



1366  
GOLD WALNUT



1367  
ANTIQUE WALNUT




1368  
OYSTER OAK



1369  
BLUE GREY OAK




1370  
PARISIAN OAK

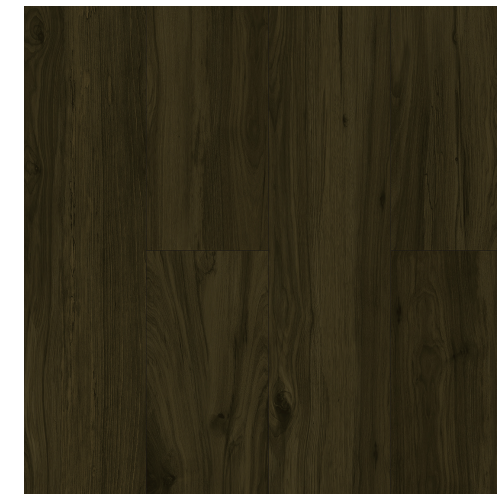

1371  
AUGUSTA DARK OAK



1372  
COASTAL OAK

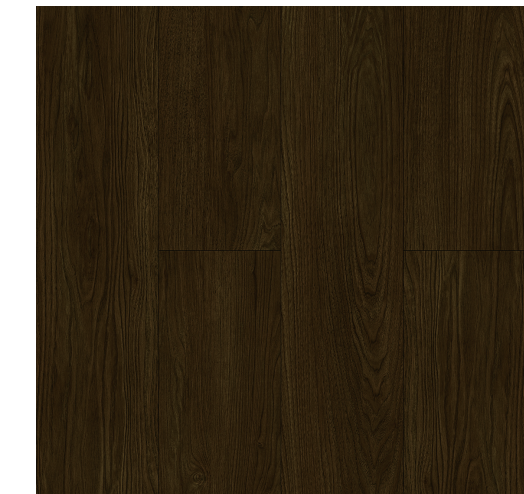

1373  
NATURAL WENGE

## TILE



6370  
ARCTURUS



6371  
SIRIUS



6372  
BETELGEUSE



6373  
ACRUX

# PLANK

1360  
GREY  
WALNUT



1361  
BARN OAK



1362  
FEATHERED  
OAK



1360 / GREY WALNUT

# PLANK


1360  
GREY  
WALNUT



1361  
BARN OAK



1362  
FEATHERED  
OAK

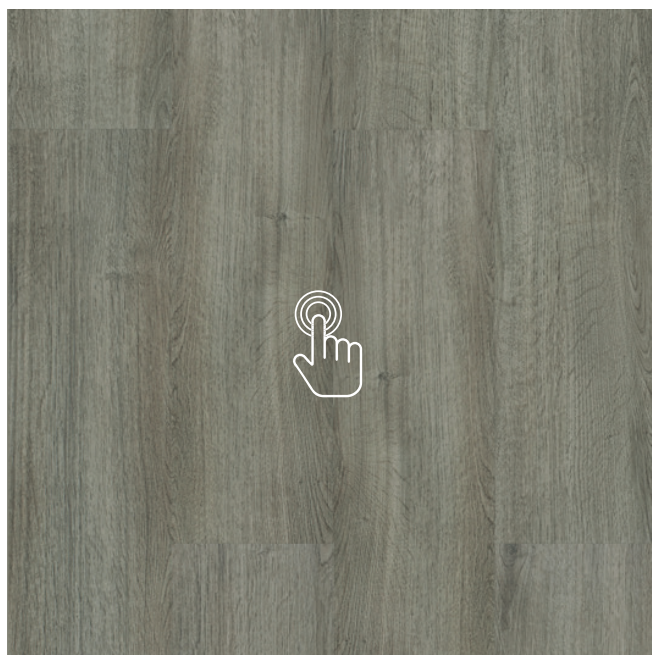

1361 / BARN OAK

# PLANK

1360  
GREY  
WALNUT



1361  
BARN OAK



1362  
FEATHERED  
OAK



1362 / FEATHERED OAK

# PLANK

1363  
GREY  
HICKORY



1364  
ASH GREY  
OAK



1365  
GOLDEN  
BROWN OAK



1363 / GREY HICKORY

---

# PLANK

---

1363  
GREY  
HICKORY



---

1364  
ASH GREY  
OAK



---


1365  
GOLDEN  
BROWN OAK




1364 / ASH GREY OAK



# PLANK

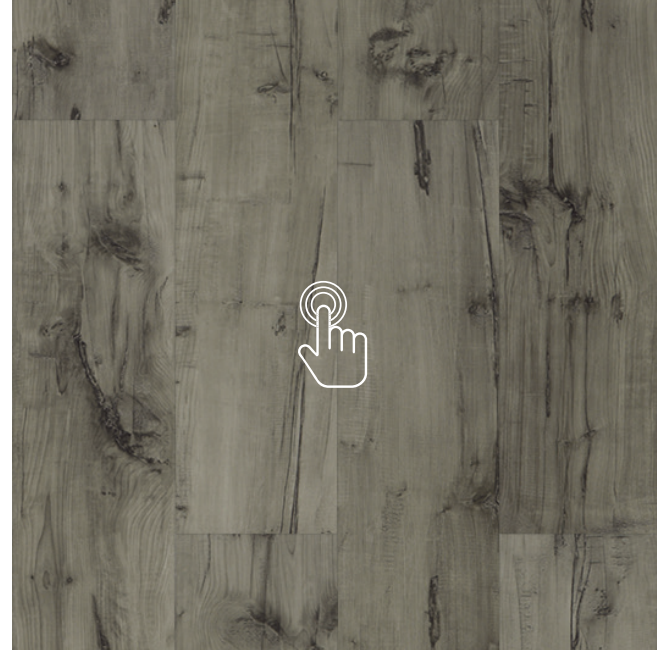

1363  
GREY  
HICKORY

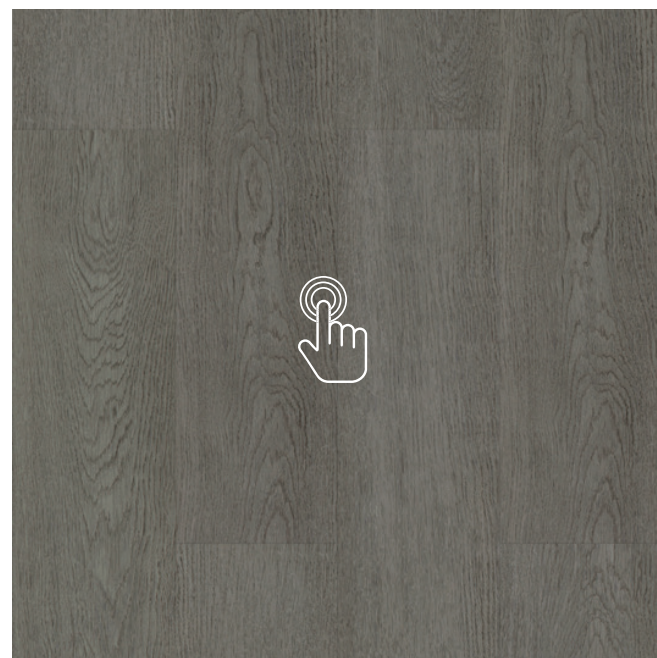

1364  
ASH GREY  
OAK



1365  
GOLDEN  
BROWN OAK




1365 / GOLDEN BROWN OAK

# PLANK

1366  
GOLD WALNUT



1367  
ANTIQUE  
WALNUT

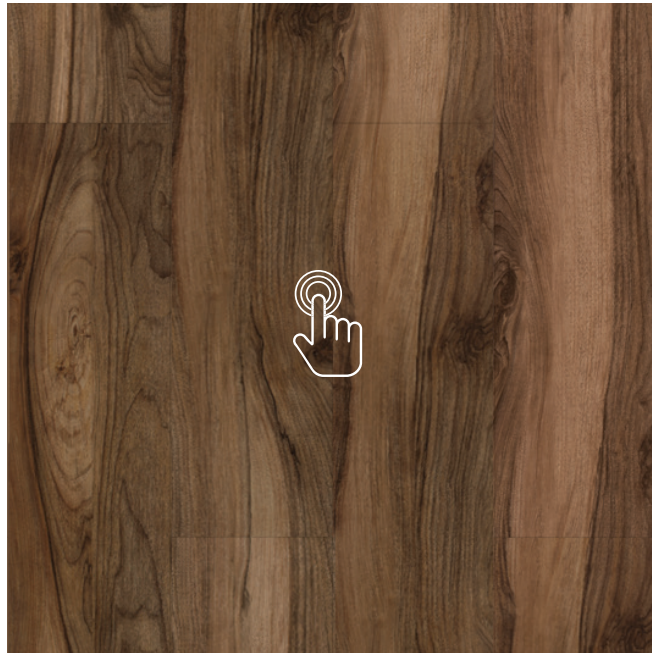

1368  
OYSTER OAK



1366 / GOLD WALNUT

# PLANK

1366  
GOLD WALNUT



1367  
ANTIQUÉ  
WALNUT




1368  
OYSTER OAK




1367 / ANTIQUÉ WALNUT

# PLANK

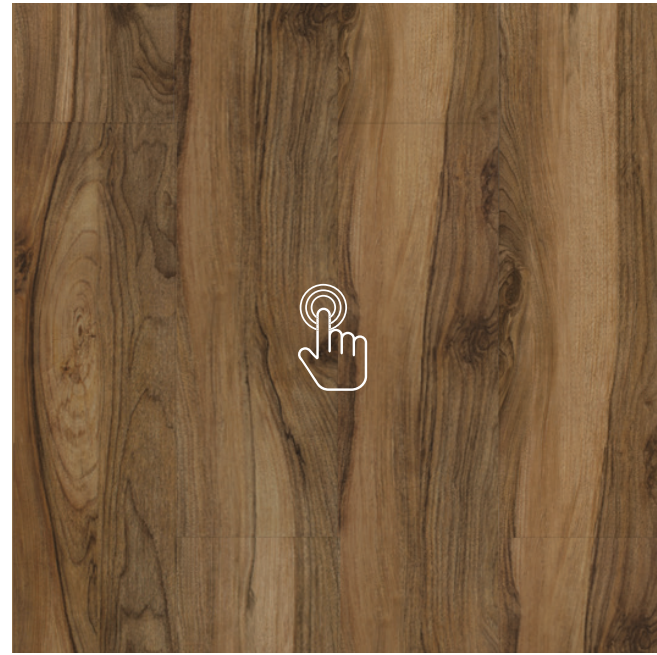

1366  
GOLD WALNUT

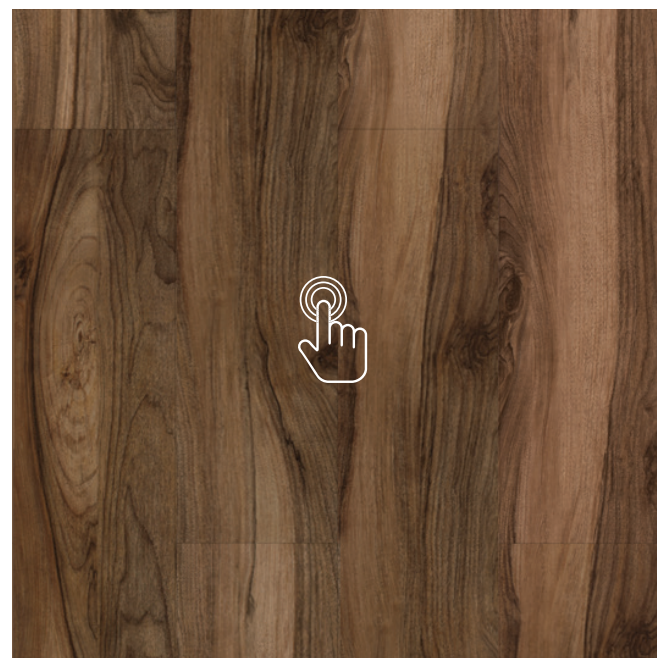

1367  
ANTIQUÉ  
WALNUT



1368  
OYSTER OAK



1368 / OYSTER OAK

# PLANK


1369  
BLUE GREY  
OAK



1370  
PARISIAN  
OAK




1371  
AUGUSTA  
DARK OAK

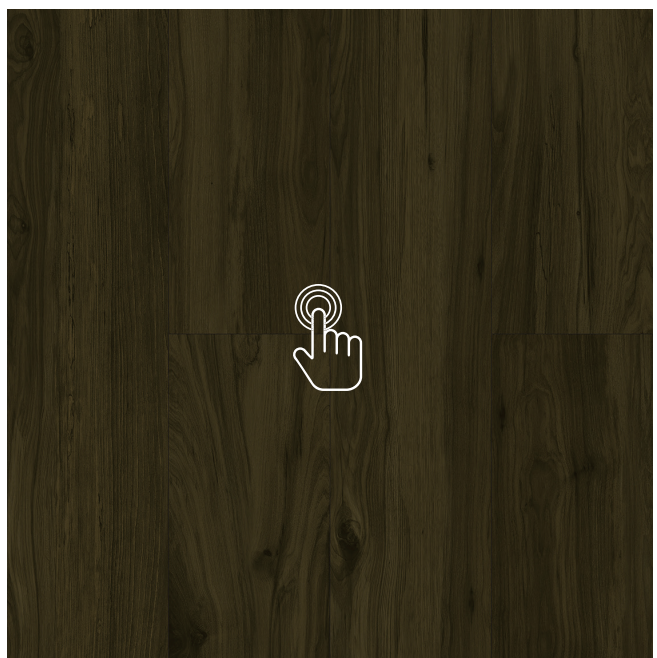

1369 / BLUE GREY OAK

# PLANK


1369  
BLUE GREY  
OAK

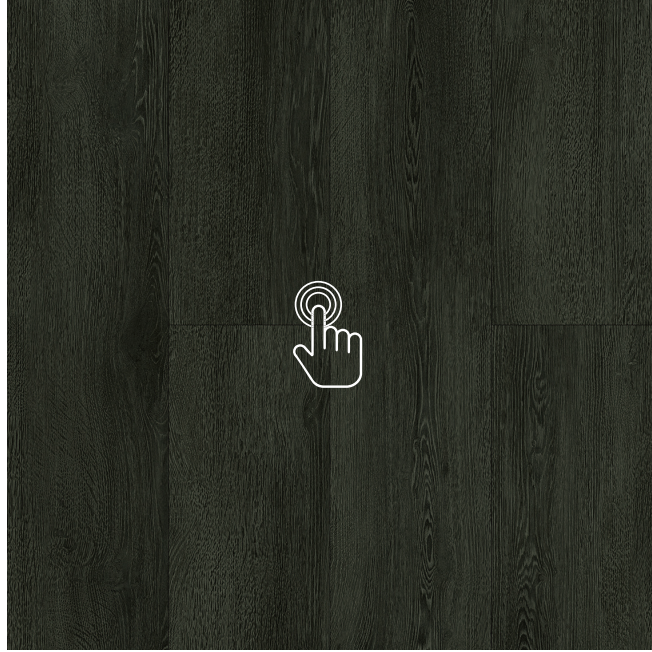

1370  
PARISIAN OAK



1371  
AUGUSTA  
DARK OAK

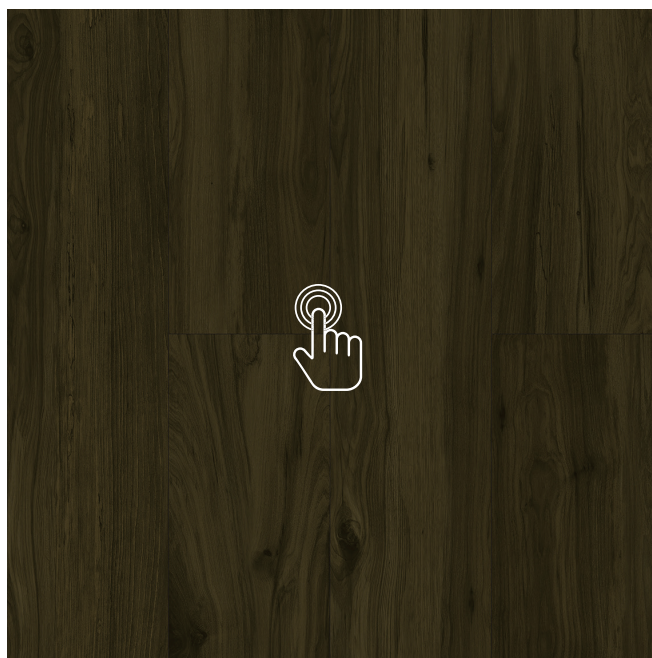

1370 / PARISIAN OAK

# PLANK

1369  
BLUE GREY  
OAK



1370  
PARISIAN  
OAK



1371  
AUGUSTA  
DARK OAK




1371 / AUGUSTA DARK OAK

# PLANK

1372  
COASTAL OAK




1373  
NATURAL  
WENGE

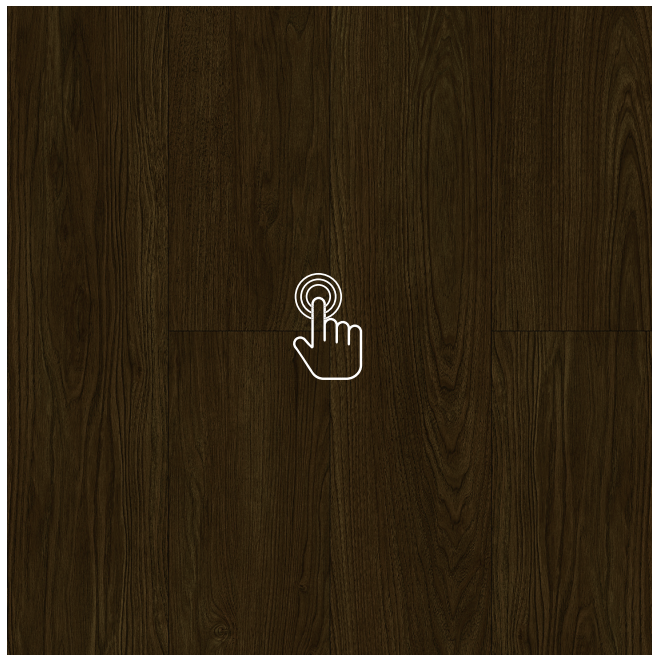


1372 / COASTAL OAK



# PLANK

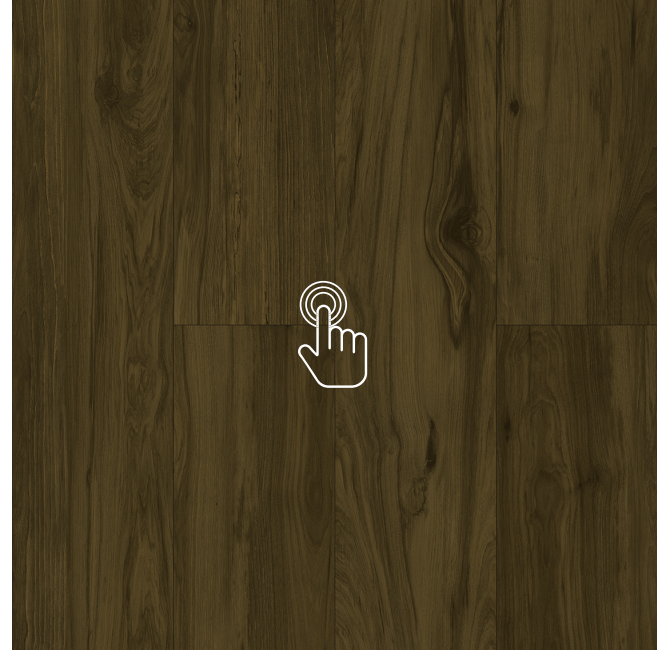

1372  
COASTAL OAK

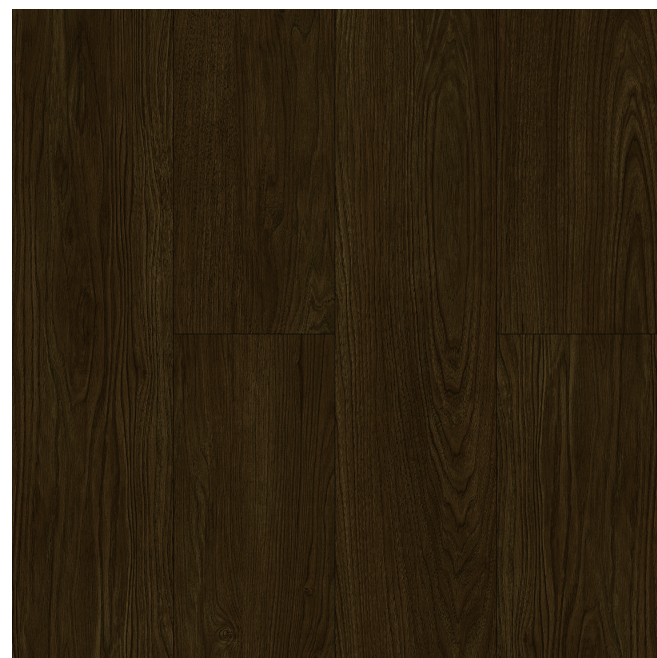

1373  
NATURAL  
WENGE



1373 / NATURAL WENGE

# TILE



6370 ARCTURUS



6371 SIRIUS



6372 BETELGEUSE



6373 ACRUX




6370 / ARCTURUS

# TILE



6370 ARCTURUS

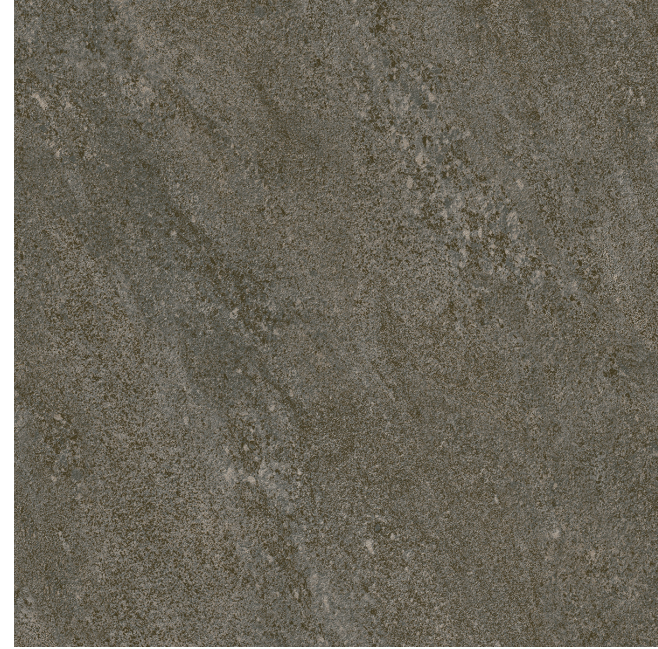

6371 SIRIUS



6372 BETELGEUSE



6373 ACRUX



6371 / SIRIUS

# TILE



6370 ARCTURUS



6371 SIRIUS



6372 BETELGEUSE



6373 ACRUX



6372 / BETELGEUSE

TILE



6370 ARCTURUS



6371 SIRIUS



6372 BETELGEUSE



6373 ACRUX



6373 / ACRUX

# LX HAUSYS Floors 2.5mm/20mil Dryback Specification



## TECHNICAL DATA

|  |  |                               |
|--|--|-------------------------------|
| <b>COLLECTION NAME</b>                                   | Pike's Peak  |                               |
| <b>SELLING STYLE #(s)</b>                                | Pike's Peak  |                               |
| <b>TOTAL # SKU'S(COLORS)</b>                             | 18 (Plank 14, Tile 4)                                |                               |
| <b>PRODUCT SPECIFICATIONS / CONTENT / CERTIFICATIONS</b> | <b>DETAILS</b>                                       | <b>ADDITIONAL INFORMATION</b> |
| Thickness  | 2.5mm (0.098 in)                                     |                               |
| Wear Layer   | 20mil (0.5mm)  |                               |
| Glass Fiber  | No   |                               |
| Finishing / Coating                                      | Enhanced UV Urethane Coating                         |                               |
| Nominal Dimensions (inches)                              | Plank(7" x 48"), Tile(12" x 24")                     |                               |
| Actual Dimensions (inches & mm)                          | Plank(180mm x 1200mm), Tile(300mm x 600mm)           |                               |
| Micro-Beveled  | No   |                               |
| Class / ASTM F1700                                       | Class III Printed Film vinyl tile - Type B(embossed) |                               |
| Backing Class  | Commercial Grade                                     |                               |
| Gloss Level  | 5-12   |                               |
| Commercial Traffic                                       | Heavy Commercial                                     |                               |
| Added Antimicrobial                                      | No   |                               |
| Recycled Contents  | 100% Virgin Vinyl                                    |                               |
| Backstamp info   | None   |                               |
| CE Certification   | Yes  |                               |



# LX HAUSYS Floors 2.5mm/20mil Dryback Specification

## TECHNICAL DATA



| PACKING SPEC'S                             | DETAILS                  |                          | ADDITIONAL INFORMATION |
|--|--------------------------|--------------------------|------------------------|
|  | Plank(7"x 48")           | Tile(12" x 24")          |                        |
| Pallet Dimensions (L x W x H)              | 1,260 x 1,010 x 157 (mm) | 1,260 x 1,010 x 157 (mm) |                        |
| Square feet per plank/tile [formula field] | 2.325                    | 1.938                    |                        |
| Square feet per carton                     | 41.850                   | 42.625                   |                        |
| Square feet per pallet                     | 2,511.005                | 3,069.006                |                        |
| Square feet per container [formula field]  | 40,176.079               | 42,966.084               | 20 foot container      |
| Weight per sq ft(lbs) [formula field]      | 0.878                    | 0.878                    |                        |
| Weight per plank/tile (lbs/plank)          | 2.041                    | 1.701                    |                        |
| Weight per carton (lbs)                    | 36.742                   | 37.422                   |                        |
| Weight per pallet (lbs)                    | 2,204.496                | 2,694.384                |                        |
| Weight per container (lbs)                 | 35,271.936               | 37,721.376               |                        |
| Pieces per box                             | 18                       | 22                       |                        |
| Boxes per pallet                           | 60                       | 72                       |                        |
| Box Type                                   |                          |                          |                        |
| Pallet per container                       | 16                       | 14                       |                        |
| Boxes per container [formual field]        | 960                      | 1008                     |                        |

# LX HAUSYS Floors 2.5mm/20mil Dryback Specification

## TECHNICAL DATA



| PRODUCT PERFORMANCE / TESTING     | PERFORMANCE                | ASTM REQUIREMENT                          |
|-----------------------------------|----------------------------|---|
| ASTM F2055 Size and Tolerance     | Passes                     | As speicfied 0.016 in./lin.ft             |
| ASTM F386 Thickness               | Passes                     | As speicfied 0.005 in./lin.ft             |
| ASTM F2055 Squareness             | Passes                     | Max. 0.010 in.                            |
| ASTM F1914 Residual Indentation   | Passes                     | Avg. < 8%                                 |
| ASTM F137 Flexibility             | Passes 6mm mandrel         | 1 in (25.4mm) mandrel / no crack or break |
| ASTM F2199 Dimension Stability    | Passes                     | < 0.020in./ft                             |
| ASTM F925 Chemical Resistance     | Passes                     | No change/Slight change                   |
| ASTM F1514 Resistance to Heat     | Passes                     | < 8 (delta E) avg.                        |
| ASTM F1515 Resistance to Light    | Passes                     | < 8 (delta E) avg.                        |
| ASTM E648 Critical Radiant Flux   | Class 1                    | Class 1 ( < 0.45 W/cm <sup>2</sup> )      |
| ASTM E662 Optical Smoke Density   | Passes                     | < 450                                     |
| ASTM C1028 Slip Resistance        | Passes                     | ADA Compliant( > 0.50)                    |
| ASTM F970 Static Load             | 1000 psi                   | 250 psi( < 0.005")                        |
| TECHNICAL INFORMATION / DOCUMENTS | DETAILS                    | ADDITIONAL INFORMATION                    |
| Product Warranty                  | 10 years for Commercial    |   |
| Installation Method               | Full spread                |   |
| Approved Installation Methods     | Above, Below, and On-Grade |   |
| Recommended Adhesive(s)           | Any approved LVT adhesive  |   |
| Polished Required (Y/N)           | None                       |   |





# PIKE'S PEAK



[www.lxhausys.com](http://www.lxhausys.com)

For more information, Go to Website

 **LX Hausys**

Copyright © LX Hausys All rights reserved.