

 LX Hausys


www.lxhausys.com

SAVANA

SAVANA

Savana (SPC Click)

Basic Construction

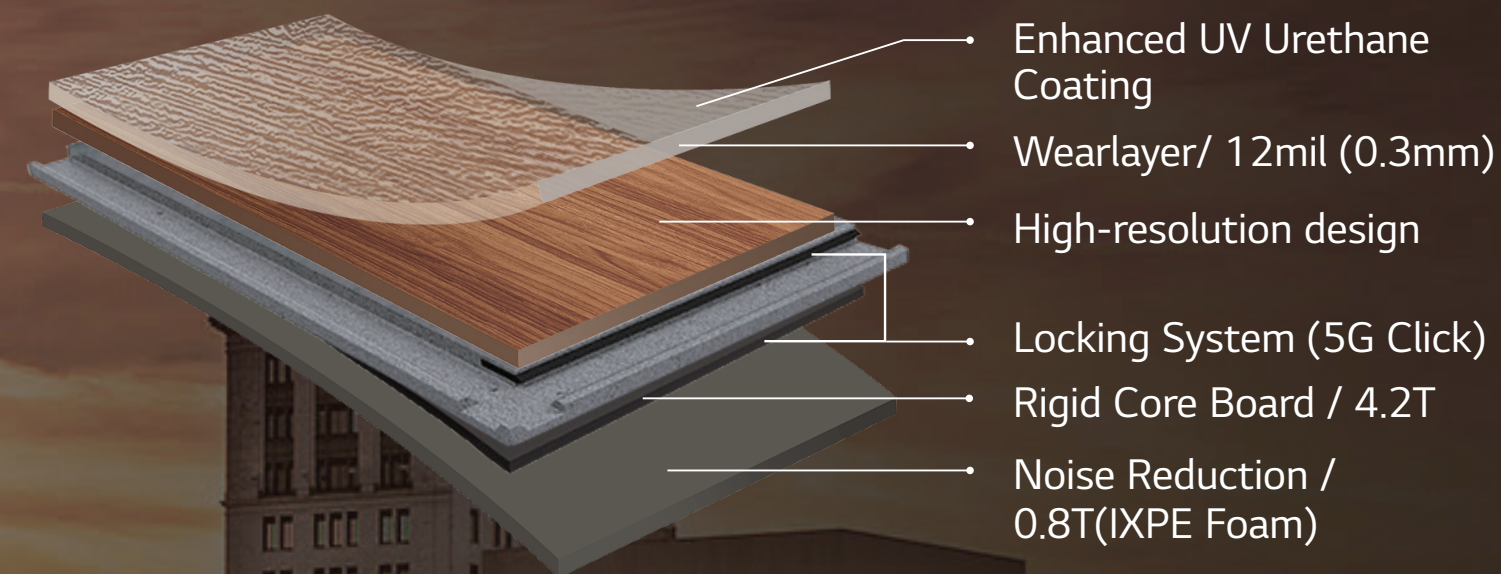

Features

EASY INSTALLATION with 5G CLICK

- Shortened installation time and maximized coherence by applying Valinge 5G Click structure.

HIGH-RESOLUTION REALITY IMAGE


- High-resolution photo quality printing is applied to elaborately express the reality of the material.

TRANSFER GUARD (PREVENTS FLOOR TRANSFER)

- Transfer guard technology prevents the visual transferring of scrape marks and floor curling.

Savana (2T LVT)

Basic Construction

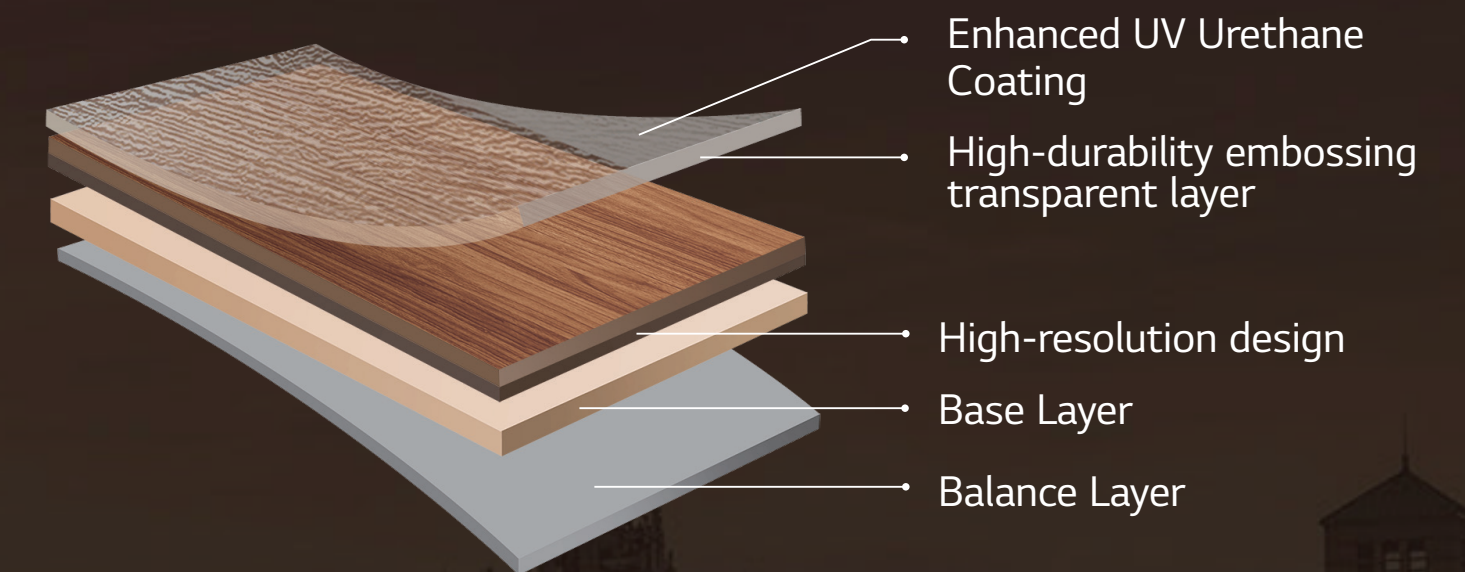

Features

HIGH-RESOLUTION REALITY IMAGE

- High-resolution photo quality printing is applied to elaborately express the reality of the material.

ECO & HUMAN-FRIENDLY PRODUCT

- FloorScore® and DIBt certified for low VOCs
- Phthalate Free(DEHP·DBP·BBP·DIDP·DINP·DNOP) & Heavy Metal Free(Cd·Pb·Hg·Cr6+)
- Made from safer, stronger 100% virgin raw materials

EXCELLENT RESISTANCE TO WATER

- DecoTile has a strong resistance against water. (No swelling, no distortion)

SAVANA COLLECTION

※ Colors can be different from samples/index. Please check the actual product.
※ Applying the natural characters of woods/stones with diverse colors and visuals.

Eastern Oak



9131 Relax



9133 Sunshine



9135 Vintage

Brushed Elm



9121 Sunset



9123 Calm



9125 Ambience

SAVANA

EASTERN OAK

BRUSHED ELM

CONCEPT 01

Eastern Oak

Live Oak and the Spanish Moss Tree represent the Savannah region.
Show the traces of the enduring of the years.
Branches grow in a unique curved shape, implements Oak Grain as a solidly cohesive wave.
Expresses the soft texture that naturally appears in rough texture.



SAVANA

EASTERN OAK

BRUSHED ELM

CONCEPT 01

Eastern Oak

Live Oak and the Spanish Moss Tree represent the Savannah region.
Show the traces of the enduring of the years.
Branches grow in a unique curved shape, implements Oak Grain as a solidly cohesive wave.
Expresses the soft texture that naturally appears in rough texture.




Pattern Full Repeat


Eastern Oak



9131
Relax

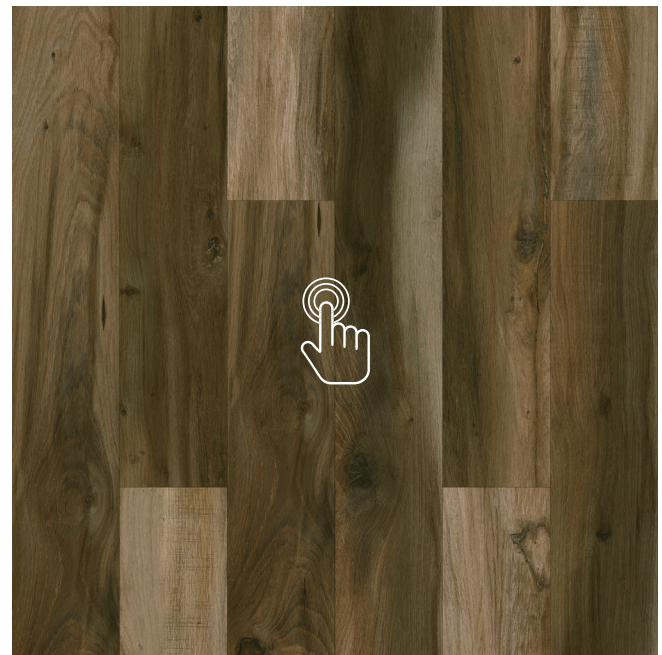

9133
Sunshine

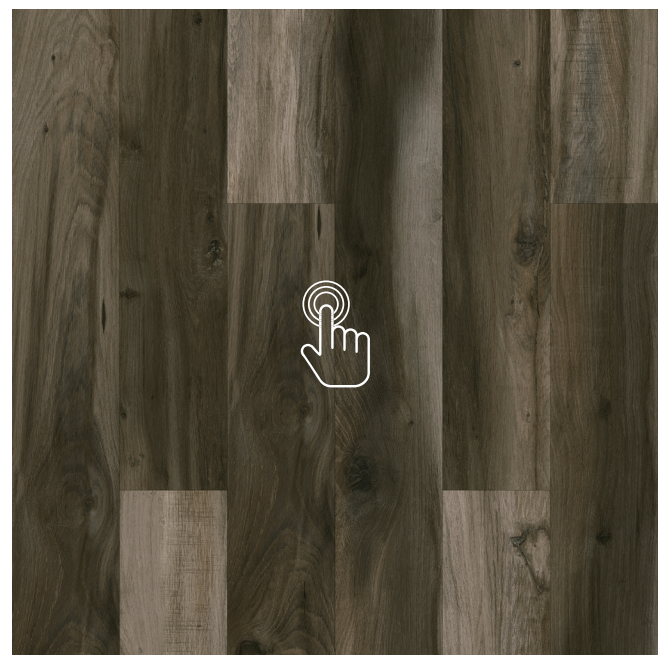

9135
Vintage



Pattern Full Repeat
Eastern Oak



9131
Relax



9133
Sunshine



9135
Vintage



Pattern Full Repeat
Eastern Oak



9131
Relax



9133
Sunshine



9135
Vintage



CONCEPT 02

Brushed Elm

It captures the city's unique colors with beautiful views of the Savannah river and harbor which are historically important from the past.

Inspired by the shape of the swaying wave, Elm's unique calm and steeply curved grains are implemented.

The effect of light breaking by the wave is expressed with a diffused reflection to add depth in texture.



CONCEPT 02

Brushed Elm

It captures the city's unique colors with beautiful views of the Savannah river and harbor which are historically important from the past.

Inspired by the shape of the swaying wave, Elm's unique calm and steeply curved grains are implemented.

The effect of light breaking by the wave is expressed with a diffused reflection to add depth in texture.



Pattern Full Repeat

Brushed Elm

9121
Sunset



9123
Calm



9125
Ambience




Pattern Full Repeat
Brushed Elm



9121
Sunset



9123
Calm

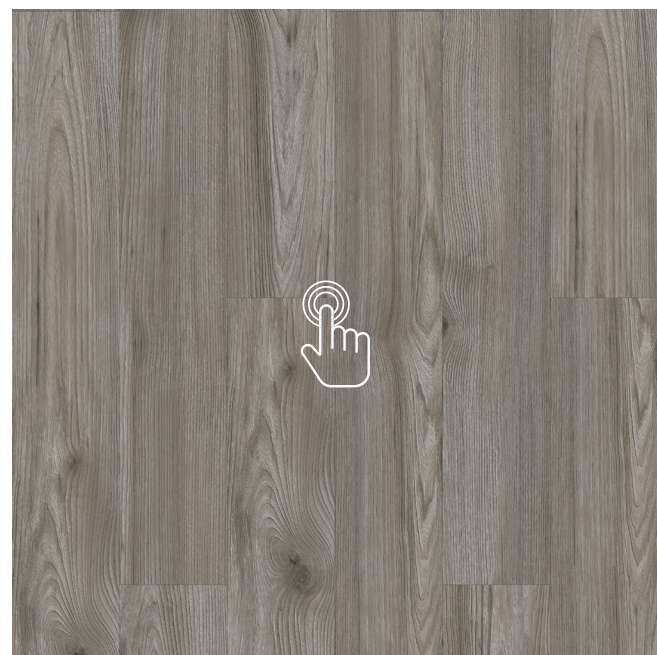

9125
Ambience



Pattern Full Repeat
Brushed Elm



9121
Sunset



9123
Calm



9125
Ambience



LX HAUSYS FLOORS SAVANA CLICK SPECIFICATION

COLLECTION NAME	Savana SPC	
SELLING STYLE #(s)	Savana SPC	
TOTAL # SKU'S(COLORS)	6	
PRODUCT SPECIFICATIONS / CONTENT / CERTIFICATIONS	DETAILS	ADDITIONAL INFORMATION
Thickness	5.0mm (0.197 in)	with 0.8mm IXPE Foam
Wear Layer	12mil (0.3mm)	
Glass Fiber	N/A	
Finishing / Coating	Enhanced UV Urethane Coating	
Nominal Dimensions (inches)	6" x 48"	
Actual Dimensions (inches & mm)	150mm x 1200mm	
Micro-Beveled	Yes	
Class / ASTM F1700	Class III Printed Film vinyl tile - Type B(embossed)	
Backing Class	IXPE Foam	
Gloss Level	4~8	
Commercial Traffic	Light Commercial	
Added Antimicrobial	No	
Recycled Contents	100% Virgin Vinyl	
Backstamp info	None	
CE Certification	Yes	



LX HAUSYS FLOORS SAVANA CLICK SPECIFICATION

PACKING SPEC'S	DETAILS	ADDITIONAL INFORMATION
	6" x 48"	
Product dimension (Width, mm)	150mm	
Product dimension (Length, mm)	1220mm	
Pallet Dimensions (L x W x H)	1,050 x 1,300 x 981mm	
Square feet per plank/tile [formula field]	1.94	
Square feet per carton	23.64	
Square feet per pallet	1701.92	
Square feet per container [formula field]	27230.68	20 foot containerWeight
Weight per sq ft(lbs) [formula field]	1.54	
Weight per plank/tile (lbs/plank)	3.03	
Weight per carton (lbs)	36.36	
Weight per pallet (lbs)	2617.81	
Weight per container (lbs)	41885.00	
Pieces per box	12	
Boxes per pallet	72	
Box Type		
Pallet per container	16	
Boxes per container [formual field]	1152	



LX HAUSYS FLOORS SAVANA CLICK SPECIFICATION

PRODUCT PERFORMANCE / TESTING	PERFORMANCE	ASTM REQUIREMENT
ASTM F2421 Size and Tolerance	Exceeds with .006" avg	As speicfied 0.016 in./lin.ft
ASTM F387 Thickness	Passes	As speicfied +/- 0.005 in./lin.ft
ASTM F2421 Squareness	Exceeds with .003" avg	Max. 0.010"
ASTM F1914 Residual Indentation	Exceeds with .001"	Avg.≤0.007"
ASTM F2199 Dimension Stability	0" of change at 158°F	< 0.020in./ft
ASTM F925 Chemical Resistance	No Change	No change/Slight change
ASTM F1514 Resistance to Heat	Exceeds with .36 (Delta E)	< 8 (delta E) avg.
ASTM F1515 Resistance to Light	Exceeds with .37 (Delta E)	< 8 (delta E) avg.
ASTM E648 Critical Radiant Flux	Exceeds NFPA 101 Class 1 Rating at 1.04 W/cm ²)	Class 1 (< 0.45 W/cm ²)
ASTM E662 Optical Smoke Density Flaming	Passes with 342 Average Manixum Density	< 450 Average Manixum Density
ASTM E662 Optical Smoke Density Non-Flaming	Passes with 434 Average Manixum Density	< 450 Average Manixum Density
ASTM C1028 Slip Resistance	Exceeds Wet and Dry conditions	ADA Compliant(> 0.50)
ASTM F970 Static Load	Exceeds at .002"	250 psi(0.005")
ASTM F3261 Surface Integrity of Wear Layer	No puncture through wear layer	No puncture through wear layer
TECHNICAL INFORMATION / DOCUMENTS	DETAILS	ADDITIONAL INFORMATION
Product Warranty	10 years for Light Commercial/ 25 years Residential	
Installation Method	Click	
Recommended Adhesive(s)	No Adhesives	
Polished Required (Y/N)	None	



LX HAUSYS FLOORS SAVANA GLUEDOWN SPECIFICATION

COLLECTION NAME	Savana Dryback	
SELLING STYLE #(s)	Savana Dryback	
TOTAL # SKU'S(COLORS)	6	
PRODUCT SPECIFICATIONS / CONTENT / CERTIFICATIONS	DETAILS	ADDITIONAL INFORMATION
Thickness	2.0mm (0.787 in)	
Wear Layer	12mil (0.3mm)	
Glass Fiber		
Finishing / Coating	Enhanced UV Urethane Coating	
Nominal Dimensions (inches)	6" x 48"	
Actual Dimensions (inches & mm)	150mm x 1200mm	
Micro-Beveled	No	
Class / ASTM F1700	Class III Printed Film vinyl tile - Type B(embossed)	
Backing Class	Commercial Grade	
Gloss Level	4~8	
Commercial Traffic	Light Commercial	
Added Antimicrobial	No	
Recycled Contents	100% Virgin Vinyl	
Backstamp info	None	
CE Certification	Yes	



LX HAUSYS FLOORS SAVANA GLUEDOWN SPECIFICATION

PACKING SPEC'S	DETAILS	ADDITIONAL INFORMATION
	6" x 48"	
Product dimension (Width, mm)	150mm	
Product dimension (Length, mm)	1200mm	
Pallet Dimensions (L x W x H)	1260 x 1010 x770mm	
Square feet per plank/tile [formula field]	1.94	
Square feet per carton	52.31	
Square feet per pallet	3138.78	
Square feet per container [formula field]	50220.52	20 foot containerWeight
Weight per sq ft(lbs) [formula field]	0.77	
Weight per plank/tile (lbs/plank)	1.49	
Weight per carton (lbs)	40.17	
Weight per pallet (lbs)	2410.09	
Weight per container (lbs)	38561.50	
Pieces per box	27	
Boxes per pallet	60	
Box Type	U	
Pallet per container	16	
Boxes per container [formual field]	960	



LX HAUSYS FLOORS SAVANA GLUEDOWN SPECIFICATION

PRODUCT PERFORMANCE / TESTING	PERFORMANCE	ASTM REQUIREMENT
ASTM F2055 Size and Tolerance	Exceeds with .006" avg	As specified 0.016 in./lin.ft
ASTM F386 Thickness	Passes	As specified 0.005 in./lin.ft
ASTM F2055 Squareness	Exceeds with .003" avg	Max. 0.010 in.
ASTM F1914 Residual Indentation	Passes	Avg. < 8%
ASTM F137 Flexibility	Passes 6mm mandrel	1 in (25.4mm) mandrel / no crack or break
ASTM F2199 Dimension Stability	0" of change at 158°F	< 0.020in./ft
ASTM F925 Chemical Resistance	No Change	No change/Slight change
ASTM F1514 Resistance to Heat	Exceeds with .36 (Delta E)	< 8 (delta E) avg.
ASTM F1515 Resistance to Light	Exceeds with .37 (Delta E)	< 8 (delta E) avg.
ASTM E648 Critical Radiant Flux	Exceeds NFPA 101 Class 1 Rating at 1.04 W/cm ²	Class 1 (< 0.45 W/cm ²)
ASTM E662 Optical Smoke Density	Exceeds 342/434 Average Maximum Density	< 450
ASTM C1028 Slip Resistance	Exceeds Wet and Dry conditions	ADA Compliant(> 0.50)
ASTM F970 Static Load	2000 psi	250 psi(< 0.005")
TECHNICAL INFORMATION / DOCUMENTS	DETAILS	ADDITIONAL INFORMATION
Product Warranty	10 years for Light Commercial/ 25 years Residential	
Installation Method	Full spread	
Approved Installation Methods	Above, Below, and On-Grade	
Recommended Adhesive(s)	Any approved LVT adhesive	
Polished Required (Y/N)	None	



SAVANA



www.lxhausys.com

For more information, Go to Website

 **LX Hausys**

Copyright © LX Hausys All rights reserved.